



### Features

- LED retrofit replacement for halogen G9 mains voltage capsules ToLEDo Retro G9 has the same look and feel as halogen design thanks to glass construction body and wide light distribution Compact design Omni-directional light distribution High lumen efficacy: up to 131lm/W Up to 91% energy saving Dimmable and non-dimmable versions Suitable for chandeliers, interior display, shop windows, decorative and general lighting applications


### Product Overview

Product name	ToLEDo Retro G9 V2 CL 250LM 827 SL
Technology	LED
Lamp shape	Capsule
Cap/Base	G9
Lamp finish	Clear
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	285
Photobiological Risk Group	RG1
Wattage (W)	2.3
Power consumption (W)	2.3
Control gear type	LED driver constant current
Dimmable	No

## ToLEDo Retro G9 V2 CL 250LM 827 SL 0030781

Housing colour	Transparent
IP rating	IP20
Product EAN number	5410288307817
Warranty	3 years
Dimming method	N/A
Useful luminous flux (#use)	250

### Technical drawings

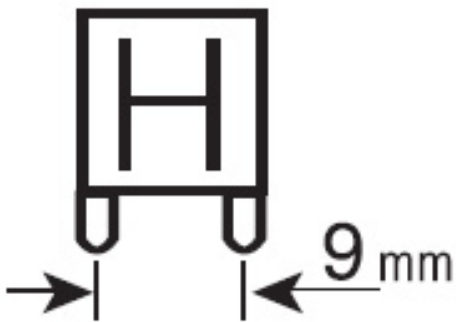

### Data table

#### GENERAL DATA

Product name	ToLEDo Retro G9 V2 CL 250LM 827 SL
Technology	LED
Lamp shape	Capsule
Cap/Base	G9
Lamp finish	Clear
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001959
Warranty	3 years

#### OPTICAL DATA

## ToLEDo Retro G9 V2 CL 250LM 827 SL 0030781

Useful luminous flux (#use)	250
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	285
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Power consumption (W)	2.3
Wattage (W)	2.3
Equivalent watt (W)	25
Current (A)	0.025
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Inrush Current (A)	9.44
Inrush Duration (µs)	7100
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz

### LIFETIME DATA

Lifespan L70 B50	15000
------------------	-------

### PHYSICAL DATA

Housing colour	Transparent
IP rating	IP20
Nominal Product Height (mm)	52.5
Nominal Product Diameter (mm)	15

## ToLEDo Retro G9 V2 CL 250LM 827 SL 0030781

Weight (kg)	0.008
-------------	-------

### PACKAGING

Product EAN number	5410288307817
Packaging single length / height (cm)	5.25
Packaging single width (cm)	1.45
Packaging single depth (cm)	1.45
DUN14 (inner)	15410288307814
Units per outer package	6
Packaging outer length / height (cm)	19.5
Packaging outer width (cm)	11.0
Packaging outer depth (cm)	9.5

### SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

# SYLVANIA

ToLEDo Retro G9 V2 CL 250LM 827 SL  
0030781

## Energy label



0030781



**3**  
kWh/1000h



2019/2015



0030781



**3**  
kWh/1000h



2019/2015