

RANA NEO Recessed 1200


RANA NEO 3700LM REC 1200x300 840 CC 1L WHITE

0052589



Product features

- Ceiling Recessed LED Linear luminaire (lay-in), with Louvre + MPO diffuser, Direct Light Distribution, Luminaire Dimensions: 1196x296x52mm, Sylvania White body colour, IP20, IK07, Constant Current, Low LED flicker (+/-5%), Neutral White (4000K), LED Colour Temperature, 3761lm, 30W, 125lm/W, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<18, Luminance at 65° < 3000 cd/m2, Lifespan: 96,000 hours L80B20, Glow Wire Test 850°C, Quick and easy electrical connection with direct access to push-connectors on top, 2 x metallic safety cables (1.5m) included, the luminaire can be covered with building insulation of Glass Wool type.

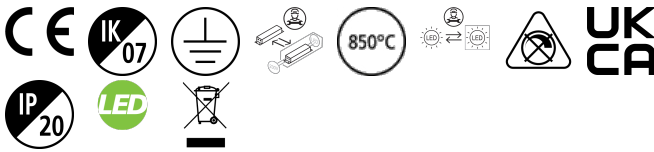


PRODUCT OVERVIEW

| | |
|-----------------------------------|--|
| Product name | RANA NEO 3700LM REC 1200x300 840 CC 1L WHITE |
| Technology | LED (3 SDCM) |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling recessed mounting |
| General application | Education, Office |
| ETIM Class | EC002892 |
| Warranty | 5 years |
| Useful luminous flux (Fuse) | 3761 |
| Fixture luminous flux (lm) | 3761 |
| Luminous flux (lm) | 3761 |
| Luminaire efficacy (lm/W) | 125 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Glare control | < 18 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 30 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | No |
| Dimming method | N/A |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9016 - Traffic white / Bezel |
| IP rating | IP20 |
| IK rating | IK07 |
| Product EAN number | 5410288525891 |

PHOTOMETRY

RANA NEO Recessed 1200

RANA NEO 3700LM REC 1200x300 840 CC 1L WHITE
0052589

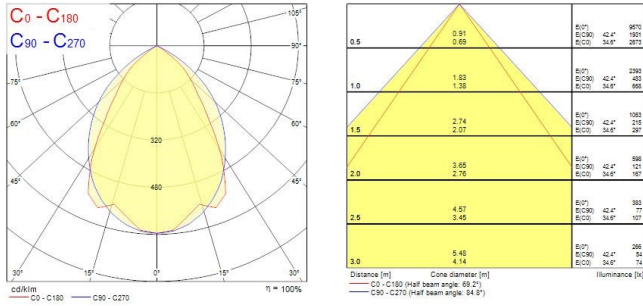

TECHNICAL DRAWINGS

