



Features

- OPTIX SURFACE 1500 ASYMMETRIC 4000K SSC is a surface or wall mounted LED Linear luminaire with Asymmetric Aluminium Reflector, Asymmetric Light Distribution, Luminaire Dimensions: 1480x200x50mm, Sylvania White body colour, IP20, IK07, SylSmart Standalone controlled, Low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 4250lm, 38W, 112lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, lifespan: 58,000 hours L90B10.


Product Overview

Product name	OPTIX SURFACE 1500 ASYMMETRIC 4000K SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	4250
Luminous flux (lm)	4250
Luminaire efficacy (lm/W)	112
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	38
Electrical protection	Class I
Control gear type	LED driver constant current
Housing colour	RAL9016

OPTIX SURFACE 1500 ASYMMETRIC 4000K SSC 2021736

IP rating	IP20
IK rating	IK07
Product EAN number	5025768217366
Warranty	5 years
Dimming method	SylSmart SSC

Photometry

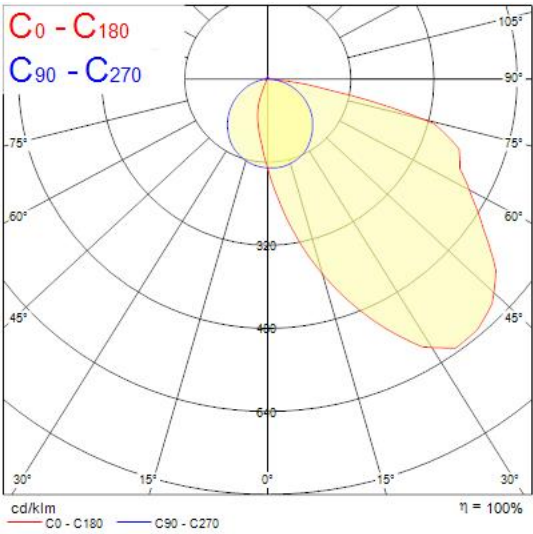

Technical drawings

