


## Data Sheet | Item Number: 2002-1211/1000-700

Component terminal block; 2-conductor; with 120R resistor; BF 0207; for DIN-rail  
35 x 15 and 35 x 7.5; 2.5 mm<sup>2</sup>; Push-in CAGE CLAMP®; 2,50 mm<sup>2</sup>; gray

<https://www.wago.com/2002-1211/1000-700>

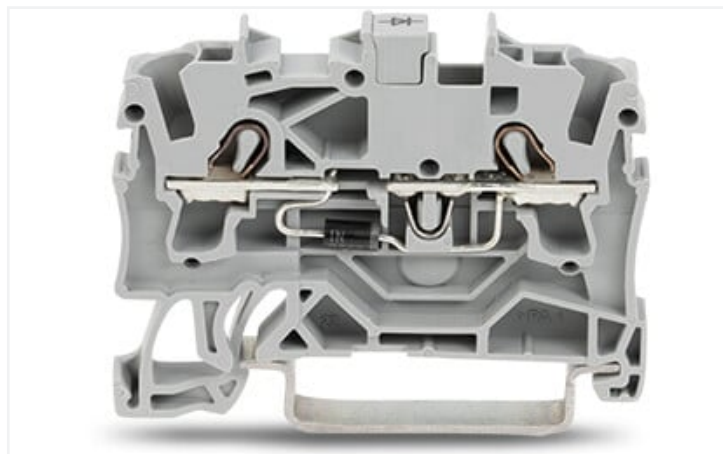

Color: ■ gray

Similar to illustration

### Electrical data

Operating voltage	250 VAC
Load current per potential	24 A
Power (max.)	0.6 W
Thermal resistance	140 K/W
Tolerance	±1%
Resistor type/design	DIN 0207

### Safety and protection

Rated surge voltage	4 kV
Pollution degree	3
Protection type	IP20

### Connection data

Connection points	2
Total number of potentials	1
Number of levels	1
Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	0.25 ... 4 mm <sup>2</sup> / 22 ... 12 AWG
Fine-stranded conductor	0.25 ... 4 mm <sup>2</sup> / 22 ... 12 AWG
Strip length	10 ... 12 mm / 0.39 ... 0.47 inches

### Physical data

Width	5.2 mm / 0.205 inches
Height	48.5 mm / 1.909 inches
Depth from upper-edge of DIN-rail	32.9 mm / 1.295 inches

### Material data

Color	gray
Insulation material	Polyamide (PA66)
Material group	I
Flammability class per UL94	V0
Fire load	0.142 MJ
Weight	5.5 g

### Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Processing temperature	-35 ... +85 °C

### Standards and specifications

Standards/specifications	EN 60947-7-1 EN 60664-1 EN 60539
--------------------------	--

### Commercial data

PU (SPU)	100 pcs
Country of origin	DE
GTIN	4055143529334
Customs tariff number	85369010000

### Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

### Downloads

#### Environmental Product Compliance

##### Compliance Search

Environmental Product  
Compliance  
2002-1211/1000-700

