


Data Sheet | Item Number: 2002-1211/1000-772

Component terminal block; 2-conductor; with 3K0 resistor; BF 0207; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

<https://www.wago.com/2002-1211/1000-772>

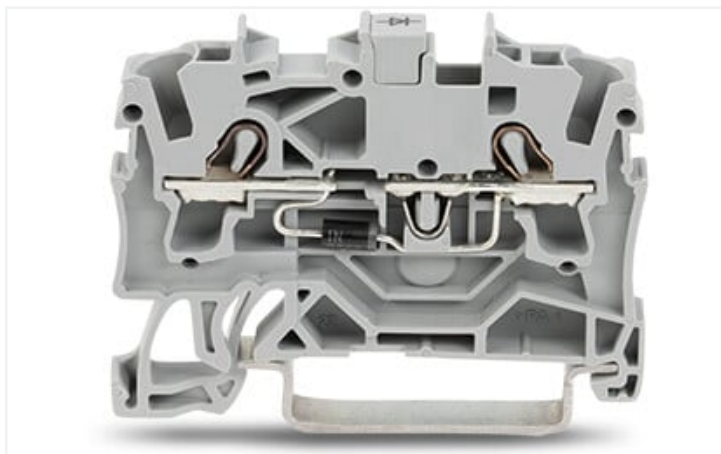

Color: ■ gray

Similar to illustration

Electrical data

Operating voltage	250 VAC
Load current per potential	24 A
Resistance	3K0
Resistor type/design	DIN 0207

Safety and protection

Rated surge voltage	4 kV
Pollution degree	3
Protection type	IP20

Connection data

Connection points	2
Total number of potentials	1
Number of levels	1
Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	0.25 ... 4 mm ² / 22 ... 12 AWG
Fine-stranded conductor	0.25 ... 4 mm ² / 22 ... 12 AWG
Strip length	10 ... 12 mm / 0.39 ... 0.47 inches

Physical data

Width	5.2 mm / 0.205 inches
Height	48.5 mm / 1.909 inches
Depth from upper-edge of DIN-rail	32.9 mm / 1.295 inches

Material data

Color	gray
Insulation material	Polyamide (PA66)
Material group	I
Flammability class per UL94	V0
Fire load	0.136 MJ
Weight	5.3 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Processing temperature	-35 ... +85 °C

Standards and specifications

Standards/specifications	EN 60947-7-1 EN 60664-1 EN 60529
--------------------------	--

Commercial data

Product Group	22 (TOPJOB S)
PU (SPU)	100 pcs
Country of origin	DE
GTIN	4050821665984
Customs tariff number	85369010000

Environmental Product Compliance

RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	7(c)-I

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance
2002-1211/1000-772

