

Optix MPO 1500 Direct

OPTIX SURFACE 1500 MPO D 4000K SSC

2021706



Product features

- OPTIX SURFACE 1500 MPO D 4000K SSC is a high efficacy low glare surface or suspended LED Linear luminaire with Micro Prismatic diffuser, with direct light distribution, luminaire dimensions: 1500x200x50mm, Sylvania White body colour (RAL9016), IP20, IK07, Sylsmart Standalone capable, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 4350lm luminous flux, 38W power consumption, 118lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<18, Luminance at 65° < 3000 cd/m2, lumen maintenance: L90B50 at 71000h, photobiological safety risk group 1. Electrical protection Class I.




PRODUCT OVERVIEW

Product name	OPTIX SURFACE 1500 MPO D 4000K SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	4350
Luminous flux (lm)	4350
Luminaire efficacy (lm/W)	118
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 20
Photobiological Risk Group	RG1
Total power consumption (W)	37
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768217069

PHOTOMETRY

Optix MPO 1500 Direct
OPTIX SURFACE 1500 MPO D 4000K SSC
2021706

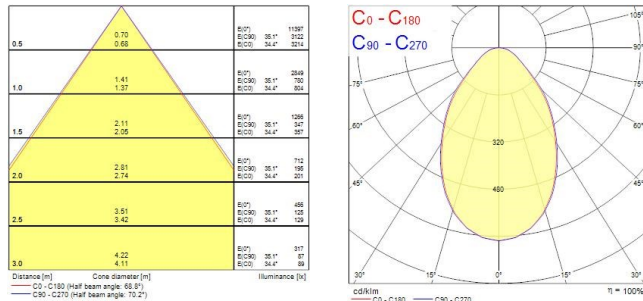

TECHNICAL DRAWINGS

