

### Features

- Integrated LED recessed spotlight, black bezel colour, black reflector, 50° degree beam angle, 3-CCT changeable 2700-3000-4000K, polycarbonate and aluminium body, low profile 62mm recessed depth, IP65 from the front, IK07, loop-in/loop-out terminals for fast wiring, 85mm bezel diameter, 68mm cutout, clear lens.


### Product Overview

|                                 |  |
|---------------------------------|--|
| Product name                    | START SPOT ALU 760LM 3CCT DIM IP65 BLK |
| Technology                      | LED                                    |
| Cap/Base                        | N/A                                    |
| Housing                         | Aluminium                              |
| Mount                           | Ceiling recessed mounting              |
| General application             | Residential & Consumer                 |
| ETIM Class                      | EC001744                               |
| Fixture luminous flux (lm)      | 760                                    |
| Luminaire efficacy (lm/W)       | 100                                    |
| Light colour                    | Neutral White                          |
| CRI (Ra)                        | 80                                     |
| Colour Variation Initial (SDCM) | 6                                      |
| Beam Angle (°)                  | 50                                     |
| Photobiological Risk Group      | RG1                                    |
| Total power consumption (W)     | 8.7                                    |
| Electrical protection           | Class II                               |
| Control gear type               | LED driver constant current            |
| Dimmable                        | Yes                                    |
| Housing colour                  | RAL9017                                |
| IP rating                       | IP65/20                                |

## START SPOT ALU 760LM 3CCT DIM IP65 BLK 0005193

|                                    |                                |
|------------------------------------|--------------------------------|
| <b>IK rating</b>                   | IK07                           |
| <b>Product EAN number</b>          | 5410288051932                  |
| <b>Warranty</b>                    | 5 years                        |
| <b>Dimming method</b>              | Mains: leading / trailing edge |
| <b>Useful luminous flux (#use)</b> | 760                            |

### Photometry

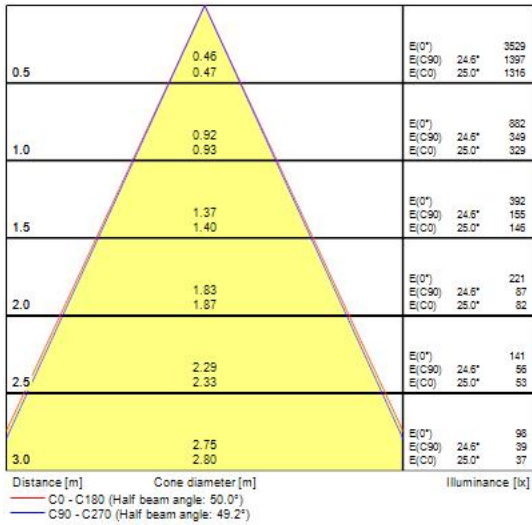

### Technical drawings

