



### Features

• OPTIX SURFACE 1500 MPO D 4000K DALI EM is a high efficacy low glare surface or suspended LED Linear luminaire with Micro Prismatic diffuser, with direct light distribution, luminaire dimensions: 1500x200x50mm, Sylvania White body colour (RAL9016), IP20, IK07, DALI dimmable, 3hr maintained emergency version, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 4350lm luminous flux, 38W power consumption, 114lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<20, Luminance at 65° < 3000 cd/m2, lumen maintenance: L90B50 at 71000h, photobiological safety risk group 1. Electrical protection Class I.


### Product Overview

|                                   |                                        |
|-----------------------------------|----------------------------------------|
| Product name                      | OPTIX SURFACE 1500 MPO D 4000K DALI EM |
| Technology                        | LED (3 SDCM)                           |
| Cap/Base                          | N/A                                    |
| Housing                           | Steel                                  |
| Mount                             | Ceiling surface mounting               |
| General application               | Education, Office                      |
| ETIM Class                        | EC002892                               |
| Fixture luminous flux (lm)        | 4350                                   |
| Luminous flux (lm)                | 4350                                   |
| Luminaire efficacy (lm/W)         | 114                                    |
| Correlated colour temperature (k) | 4000                                   |
| Light colour                      | Neutral White                          |
| CRI (Ra)                          | 80                                     |
| Colour Variation Initial (SDCM)   | 3                                      |
| Glare control                     | < 20                                   |

## OPTIX SURFACE 1500 MPO D 4000K DALI EM 2021705

|                                |                             |
|--------------------------------|-----------------------------|
| Photobiological Risk Group     | RG1                         |
| Luminous flux (emergency) (lm) | 80                          |
| Total power consumption (W)    | 38                          |
| Electrical protection          | Class I                     |
| Control gear type              | LED driver constant current |
| Housing colour                 | RAL9016                     |
| IP rating                      | IP20                        |
| IK rating                      | IK07                        |
| Product EAN number             | 5025768217052               |
| Warranty                       | 5 years                     |
| Dimming method                 | DALI                        |

### Photometry

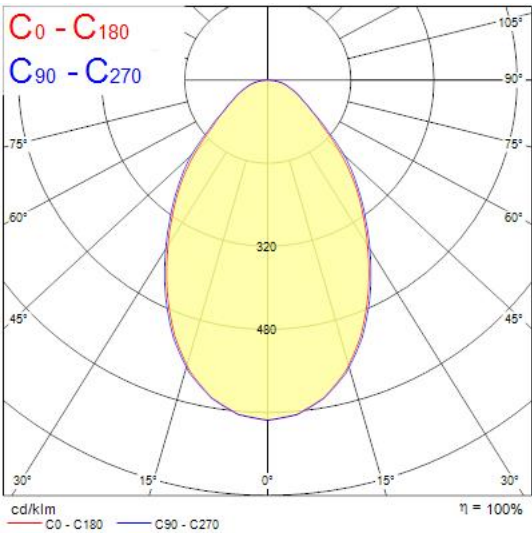

### Technical drawings

