

Optix MPO 1500 Direct


OPTIX SURFACE 1500 MPO D 4000K DALI

2021704



Product features

- OPTIX SURFACE 1500 MPO D 4000K DALI is a high efficacy low glare surface or suspended LED Linear luminaire with Micro Prismatic diffuser, with direct light distribution, luminaire dimensions: 1500x200x50mm, Sylvania White body colour (RAL9016), IP20, IK07, DALI Dimmable, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 4350lm luminous flux, 36W power consumption, 121lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<20, Luminance at 65° < 3000 cd/m2, lumen maintenance: L90B50 at 71000h, photobiological safety risk group 1. Electrical protection Class I.

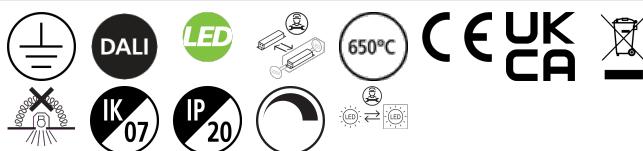


PRODUCT OVERVIEW

| | |
|-----------------------------------|-------------------------------------|
| Product name | OPTIX SURFACE 1500 MPO D 4000K DALI |
| Technology | LED (3 SDCM) |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling surface mounting |
| General application | Education, Office |
| ETIM Class | EC002892 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 4350 |
| Luminous flux (lm) | 4350 |
| Luminaire efficacy (lm/W) | 121 |
| Correlated colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Glare control | < 20 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 36 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Dimming method | DALI |
| Housing colour | RAL 9016 - Traffic white / Bezel |
| IP rating | IP20 |
| IK rating | IK07 |
| Product EAN number | 5025768217045 |

PHOTOMETRY

Optix MPO 1500 Direct

OPTIX SURFACE 1500 MPO D 4000K DALI
2021704

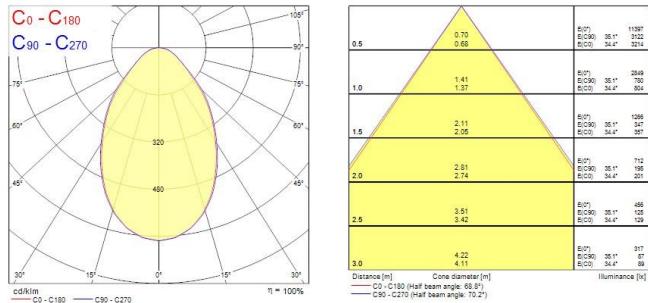

TECHNICAL DRAWINGS

