


## Sterling Bulkhead - LED

STERLING IP65 IK10 1325LM 830 SILVER  
4063833



### Product features

- Led exterior bulkhead, Unique feature allowing a choice between High Output or High Efficiency with the flick of a switch, die-cast aluminium body, 684/1325LM, 9/17W, 76/78LM/W, 3000K, Driver Current: 350/750mA, CRI80, Non dimmable, IP65, IK10, lifespan 100,000hrs (L70:B50), (HxWxD) 350 x 350 x 128mm, 3.4kg, 3 step MacAdam ellipse, RAL 9006, Class 1, 230V, energy class: A++, A+, A

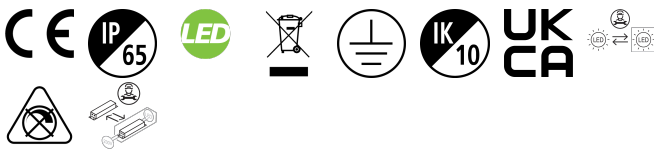

### PRODUCT OVERVIEW

Product name	STERLING IP65 IK10 1325LM 830 SILVER
Technology	LED
Cap/Base	N/A
Environment	Indoor, Outdoor
General application	Education, Hospitality, Logistics & Industry, Office, Residential & Consumer, Retail
ETIM Class	EC002892
E-number FI	4579259
Warranty	5 years
Fixture luminous flux (lm)	684/1325
Luminaire efficacy (lm/W)	78
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Photobiological Risk Group	RG1
Total power consumption (W)	9/17
Electrical protection	Class I
Dimmable	No
Housing colour	Silver
IP rating	IP65
IK rating	IK10
Product EAN number	5026524638333

### DATA TABLE

#### General data

Product name	STERLING IP65 IK10 1325LM 830 SILVER
Technology	LED
Cap/Base	N/A
Environment	Indoor, Outdoor

## Sterling Bulkhead - LED

*STERLING IP65 IK10 1325LM 830 SILVER*  
4063833

General application	Education, Hospitality, Logistics & Industry, Office, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+35°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4579259
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	684/1325
Luminaire efficacy (lm/W)	78
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	9/17
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
Electrical protection	Class I
Dimmable	No
Drive current (mA)	700
Inrush Current (A)	17
Inrush Duration (µs)	199
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	38
Max. products per 13A C Breaker	50
Max. products per 16A C Breaker	61
Max. products per 20A C Breaker	78
Max. products per 10A B Breaker	23
Max. products per 13A B Breaker	30
Max. products per 16A B Breaker	37
Max. products per 20A B Breaker	47

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

### Physical data

Housing colour	Silver
IP rating	IP65
IK rating	IK10

## Sterling Bulkhead - LED

STERLING IP65 IK10 1325LM 830 SILVER  
4063833

Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	128
Nominal Product Diameter (mm)	350
Weight (kg)	3.4





### Packaging

Single packaging type	Carton
Product EAN number	5026524638333
Packaging single length / height (cm)	36.0
Packaging single width (cm)	36.0
Packaging single depth (cm)	13.5
DUN14 (outer)	05026524638333
Units per outer package	1
Packaging outer length / height (cm)	36.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	13.5

### Safety data

Optimal operating condition (°C)	-20-35
----------------------------------	--------

## PHOTOMETRY

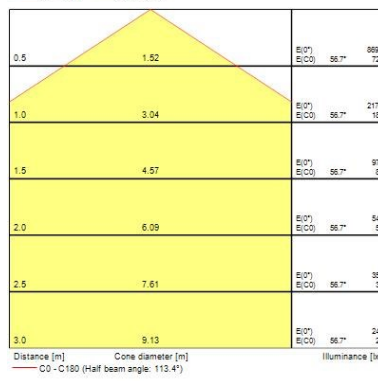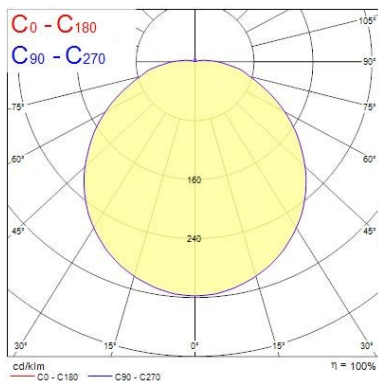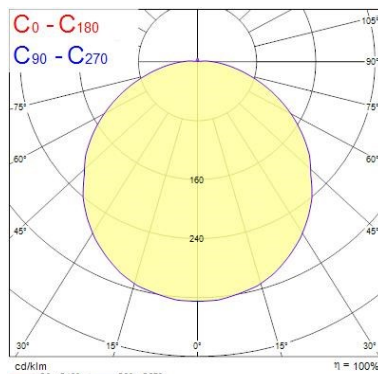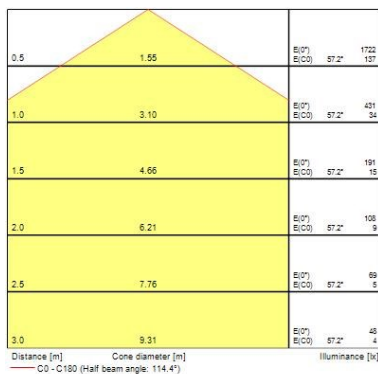

## Sterling Bulkhead - LED

*STERLING IP65 IK10 1325LM 830 SILVER*  
4063833

### TECHNICAL DRAWINGS

---

