



# ENERG

енергия · ενεργεια



10071641

alpha innotec

SWCV162H3



55 °C

35 °C

A+++

A+++

A+++

A++

A+

A

B

C

D



**44** dB



- dB

- 16
- **16**
- 16

kW

- 16
- **16**
- 16

kW



2019

811/2013



# ENERGY

10071641

alpha innotec

SWCV162H3



55 °C

35 °C



**44** dB



- dB

■ 16  
■ **16**  
■ 16  
kW

■ 16  
■ **16**  
■ 16  
kW





# ENERG

енергия · ενεργεια

Y

IJA

IE

IA

10071641

alpha innotec

SWCV162H3 + Luxtronik 2.1



A+++

A+++

A++

A+

A

B

C

D

E

F

G

A+++

+



+



+



+



package (heat pumps and combination heater with heat pump) - SWCV162H3 + Luxtronik 2.1

Seasonal space heating energy efficiency of heat pump ( $\eta_s$ )

① 154 %

**Rated heat output of the heat pump ( $P_{rated}$  kW)**

16

Temperature control

Class

VII (Table 1)

+

② 3,5 %

Supplementary boiler

package with hot water storage tank

no

$P_{sup}$  kW (rated heat output of supplementary heater)

$\eta_s$  % ( $\sigma_{\pi}$ )

$(\eta_s \% (sup) - ①) \times (\alpha_{WP}) = -$  ③ %

( $\alpha_{WE}$ : see Table 3)

( $\alpha_{WE}$ )

solar contribution

( $A_{Koll}$  m<sup>2</sup>)

( $\eta_{Koll}$  %)

( $V_{Sp}$  m<sup>3</sup>)

(standstill heat loss of the hot water storage tank in W)

( $\eta_{Sp}$ : Table 2)


$((294/P_{rated} \times 11) \times (A_{Koll} \text{ m}^2) + (115/P_{rated} \times 11) \times (V_{Sp} \text{ m}^3)) \times 0,45 \times ((\eta_{Koll} \%)/100) \times (\eta_{Sp}) = +$  ④ %

Seasonal space heating energy efficiency of package

⑤ 158 %

rounded to the nearest integer

Seasonal space heating energy efficiency class of package

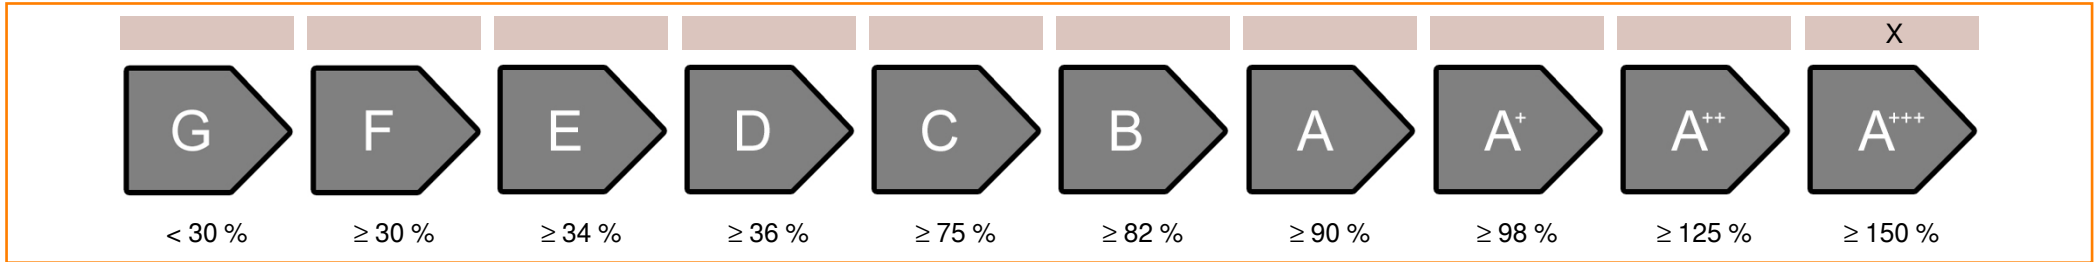

Seasonal space heating energy efficiency under colder or warmer climate conditions

Seasonal space heating energy efficiency of the heat pump ( $\eta_s$ ) under colder climate conditions

160 %

Seasonal space heating energy efficiency of the heat pump ( $\eta_s$ ) under warmer climate conditions

151 %

colder ⑤ 158 -V -5 = 163 warmer ⑤ 158 +VI -3 = 155

<b>heatpump datasheet:</b>			
<b>manufacturer:</b>	alpha innotec		
<b>model:</b>	SWCV162H3		
<b>Information concerning energy efficiency class and rated heat output:</b>			
	average / low	average / medium	
energy efficiency class space heater:	A+++	A+++	-
rated heat output:	16	16	kW
energy efficiency space heater:	199	154	%
annual final energy consumption space heater	6355	8154	kWh
sound power level indoors		44	dB
<b>special precautions concerning assembly, installation or maintenance</b>			
All instructional work in this manual may only be carried out by qualified specialist personnel in compliance with local regulations.			
<b>additional information</b>	low	medium	
rated heat output colder climate	16	16	kW
rated heat output warmer climate	16	16	kW
energy efficiency space heater colder climate	210	160	%
energy efficiency space heater warmer climate	197	151	%
annual energy consumption space heater colder climate	7198	9415	kWh
annual energy consumption space heater warmer climate	4150	5365	kWh
sound power level outdoors		-	dB

<b>technical data of the temperature controller</b>		
<b>manufacturer:</b>	<b>alpha innotec</b>	
<b>model:</b>	<b>Luxtronik 2.1</b>	
controller class	VII	-
contribution of the controller to the energy efficiency space heater	3,5	%

<b>Model</b>				<b>SWCV162H3</b>			
Air-to-water heat pump: (yes/no)				no			
Brine-to-water heat pump: (yes/no)				yes			
Water-to-water heat pump: (yes/no)				no			
Low-temperature heat pump: (yes/no)				no			
Equipped with supplementary heater: (yes/no)				yes			
combination heater with: (yes/no)				no			
application: (low/medium)				medium			
climate: (colder/average/warmer)				average			
<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>	<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>
<b>Rated heat output</b>	Prated	16	kW	<b>Seasonal space heating energy efficiency</b>	$\eta_S$	154,2	%
<b>Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj</b>				<b>Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj</b>			
Tj = -7°C	Pdh	14,2	kW	Tj = -7°C	COPd	3,00	-
Tj = +2°C	Pdh	8,7	kW	Tj = +2°C	COPd	4,10	-
Tj = +7°C	Pdh	5,6	kW	Tj = +7°C	COPd	4,90	-
Tj = +12°C	Pdh	5,5	kW	Tj = +12°C	COPd	5,00	-
Tj = bivalent temperature	Pdh	15,4	kW	Tj = bivalent temperature	COPd	2,80	-
Tj = operation limit temperature	Pdh	15,4	kW	Tj = operation limit temperature	COPd	2,80	-
For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	COPd	-	-
Bivalent temperature	T <sub>biv</sub>	-10	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P <sub>cyh</sub>	-	kW	Cycling interval efficiency	COP <sub>cyh</sub>	-	-
Degradation co-efficient (**)	Cdh	1,0	-	Heating water operating limit temperature	WTOL	65	°C
<b>Power consumption in modes other than active mode</b>				<b>Supplementary heater</b>			
Off mode	P <sub>OFF</sub>	0,002	kW	Rated heat output	P <sub>sup</sub>	-	kW
Thermostat-off mode	P <sub>TO</sub>	0,020	kW	Type of energy input	electrical		
Standby mode	P <sub>SB</sub>	0,007	kW				
Crankcase heater mode	P <sub>CK</sub>	0,030	kW				
<b>Other items</b>							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	-	m <sup>3</sup> /h
sound power level, indoors/outdoors	L <sub>WA</sub>	44 / -	dB	For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	2	m <sup>3</sup> /h
Emissions of nitrogen oxides	NO <sub>x</sub>	-	mg/kWh				
<b>For heat pump combination heater:</b>							
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
<b>Contact details</b>	ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							

<b>Model</b>				<b>SWCV162H3</b>			
Air-to-water heat pump: (yes/no)				no			
Brine-to-water heat pump: (yes/no)				yes			
Water-to-water heat pump: (yes/no)				no			
Low-temperature heat pump: (yes/no)				no			
Equipped with supplementary heater: (yes/no)				yes			
combination heater with: (yes/no)				no			
application: (low/medium)				low			
climate: (colder/average/warmer)				average			
<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>	<b>Item</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>
<b>Rated heat output</b>	Prated	16	kW	<b>Seasonal space heating energy efficiency</b>	$\eta_S$	198,8	%
<b>Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj</b>				<b>Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj</b>			
Tj = -7°C	Pdh	14,2	kW	Tj = -7°C	COPd	4,19	-
Tj = +2°C	Pdh	8,7	kW	Tj = +2°C	COPd	5,26	-
Tj = +7°C	Pdh	5,7	kW	Tj = +7°C	COPd	6,06	-
Tj = +12°C	Pdh	5,8	kW	Tj = +12°C	COPd	5,88	-
Tj = bivalent temperature	Pdh	15,9	kW	Tj = bivalent temperature	COPd	3,90	-
Tj = operation limit temperature	Pdh	15,9	kW	Tj = operation limit temperature	COPd	3,90	-
For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	COPd	-	-
Bivalent temperature	T <sub>biv</sub>	-10	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P <sub>cyh</sub>	-	kW	Cycling interval efficiency	COP <sub>cyh</sub>	-	-
Degradation co-efficient (**)	Cdh	1,0	-	Heating water operating limit temperature	WTOL	65	°C
<b>Power consumption in modes other than active mode</b>				<b>Supplementary heater</b>			
Off mode	P <sub>OFF</sub>	0,002	kW	Rated heat output	P <sub>sup</sub>	-	kW
Thermostat-off mode	P <sub>TO</sub>	0,020	kW	Type of energy input	electrical		
Standby mode	P <sub>SB</sub>	0,007	kW				
Crankcase heater mode	P <sub>CK</sub>	0,030	kW				
<b>Other items</b>							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	-	m <sup>3</sup> /h
sound power level, indoors/outdoors	L <sub>WA</sub>	44 / -	dB	For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	2	m <sup>3</sup> /h
Emissions of nitrogen oxides	NO <sub>x</sub>	-	mg/kWh				
<b>For heat pump combination heater:</b>							
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
<b>Contact details</b>	ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							