

Concord

Solstice 200 2400lm 940 DALI SB
2070234



Features

- The Solstice 200 2400lm 940 DALI SB is a high efficient DALI dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 4000K Neutral White, Class II, Protection rating IP40/IP20, Cut out dimensions: 200mm.

Product Overview


| | |
|---------------------------------|---------------------------------|
| Product name | Solstice 200 2400lm 940 DALI SB |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| E-number FI | 4262074 |
| Fixture luminous flux (lm) | 2400 |
| Luminaire efficacy (lm/W) | 141 |
| LOR (%) | 100 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 90 |
| Colour Consistency (SDCM) | 3 |
| Colour Variation Initial (SDCM) | 3 |
| Glare control | < 19 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 17 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9005 - Jet black |

Concord

Solstice 200 2400lm 940 DALI SB
2070234

| | |
|--------------------|---------------|
| IP rating | IP40/20 |
| IK rating | IK02 |
| Product EAN number | 5025768702343 |
| Warranty | 5 years |

Photometry

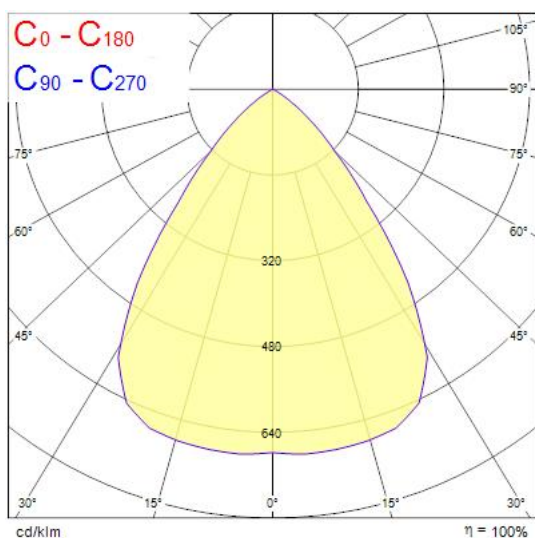

Technical drawings

