


BAP-H2020: Ball valve with handle Press 20x20

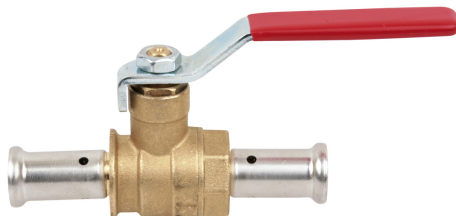

Commercial information

Brass ball valve with 2 press couplings. Handle has a red coating

Basic unit dimensions

Height	70 mm
Length	150 mm
Width	33 mm
Net weight	0.142 kg

Certificates

Applications

Potable water, Heating, Sanitary, Compressed air

Solutions

Building installations, Industry, Utility

Technical characteristics

Housing material	Brass	Diameter bolt hole	20
Material quality	CuZn40Pb2 (CW617N)	Outer pipe diameter connection 1	20 Millimetre
Surface protection housing	None	Outer pipe diameter connection 2	20 Millimetre
Material ball seal	Ethylene-propylene diene monomer rubber (EPDM)	Medium temperature (continuous)	-10 70 Degrees celsius
Material ball	Brass	Wrench width	0 Millimetre
Surface protection ball	None	Wrench width union nut	0 Millimetre
Material spindle	Steel		
Material primary spindle seal	Ethylene-propylene diene monomer rubber (EPDM)		
Material secondary spindle seal	Ethylene-propylene diene monomer rubber (EPDM)		
Nominal diameter connection 1	DN 10		
Connection 1	Press sleeve		
With coupling connection 1	✓		
Contour code connection 1	TH/BE		
Nominal diameter connection 2	DN 10		
Connection 2	Press sleeve		
With coupling connection 2	✓		
Contour code connection 2	TH/BE		
Sealing	Polytetrafluoroethylene (PTFE)		
With drain valve	✗		
With drain possibility (connection)	✗		
With filter	✗		
With thermometer	✗		
Model	Straight		
With insulation shell	✗		
UL quality mark	✗		
ULC quality mark	✗		
FM quality mark	✗		
LPCB quality mark	✗		
Fire-safe	✗		
Medically clean	✗		
Grease-free	✗		
Operation	Lever handle		
Full bore	✓		
KIWA certified	✗		