


Sterling Bulkhead - LED

STERLING IP65 IK10 1477LM 840 BLACK
4063835



Product features

- Led exterior bulkhead, Unique feature allowing a choice between High Output or High Efficiency with the flick of a switch, die-cast aluminium body, 759/1477LM, 9/17W, 84/87LM/W, 4000K, Driver Current: 350/750mA, CRI80, Non dimmable, IP65, IK10, lifespan 100,000hrs (L70:B50), (HxWxD) 350 x 350 x 128mm, 3.4kg, 3 step MacAdam ellipse, RAL 9005, Class 1, 230V, energy class: A++, A+, A

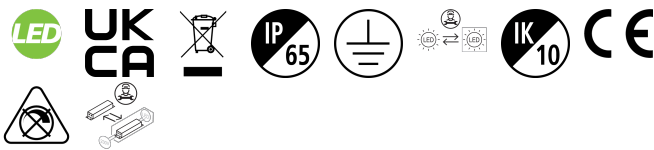


PRODUCT OVERVIEW

Product name	STERLING IP65 IK10 1477LM 840 BLACK
Technology	LED
Cap/Base	N/A
Environment	Indoor, Outdoor
General application	Education, Hospitality, Logistics & Industry, Office, Residential & Consumer, Retail
ETIM Class	EC002892
E-number FI	4579256
Warranty	5 years
Fixture luminous flux (lm)	759/1477
Luminaire efficacy (lm/W)	87
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG1
Total power consumption (W)	9/17
Electrical protection	Class I
Dimmable	No
Housing colour	Black
IP rating	IP65
IK rating	IK10
Product EAN number	5026524638357

PHOTOMETRY


Sterling Bulkhead - LED

STERLING IP65 IK10 1477LM 840 BLACK
4063835



Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(90°) E(C90)	Illuminance [lx]
0.5	1.55	5071	5071	1920
1.0	3.10	5071	5071	480
1.5	4.65	5071	5071	212
2.0	6.21	5071	5071	120
2.5	7.76	5071	5071	77
3.0	9.31	5071	5071	53

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 114.4°)



Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(90°) E(C90)	Illuminance [lx]
0.5	1.52	5071	5071	964
1.0	3.04	5071	5071	241
1.5	4.57	5071	5071	107
2.0	6.09	5071	5071	60
2.5	7.61	5071	5071	39
3.0	9.13	5071	5071	27

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 113.4°)

TECHNICAL DRAWINGS

