


BAP-H1616: Ball valve with handle Press 16x16

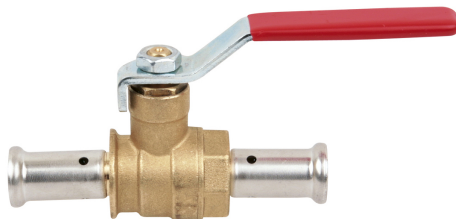

Commercial information

Brass ball valve with 2 press couplings. Handle has a red coating

Basic unit dimensions

Height	75 mm
Length	145 mm
Width	30 mm
Net weight	0.276 kg

Certificates

Applications

Potable water, Heating, Compressed air, Sanitary

Solutions

Building installations, Industry, Utility

Technical characteristics

Housing material	Brass	Diameter bolt hole	16
Material quality	CuZn40Pb2 (CW617N)	Outer pipe diameter connection 1	16 Millimetre
Surface protection housing	None	Outer pipe diameter connection 2	16 Millimetre
Material ball seal	Ethylene-propylene diene monomer rubber (EPDM)	Medium temperature (continuous)	-10 70 Degrees celsius
Material ball	Brass		
Surface protection ball	None		
Material spindle	Steel		
Material primary spindle seal	Ethylene-propylene diene monomer rubber (EPDM)		
Material secondary spindle seal	Ethylene-propylene diene monomer rubber (EPDM)		
Nominal diameter connection 1	DN 12		
Connection 1	Press sleeve		
With coupling connection 1	✓		
Contour code connection 1	TH/BE		
Nominal diameter connection 2	DN 8		
Connection 2	Press sleeve		
With coupling connection 2	✓		
Contour code connection 2	TH/BE		
Sealing	Polytetrafluoroethylene (PTFE)		
With drain valve	✗		
With drain possibility (connection)	✗		
With filter	✗		
With thermometer	✗		
Model	Straight		
With insulation shell	✗		
UL quality mark	✗		
ULC quality mark	✗		
FM quality mark	✗		
LPCB quality mark	✗		
Fire-safe	✗		
Medically clean	✗		
Grease-free	✗		
Operation	Lever handle		
Full bore	✓		
VdS quality mark	✗		
DVGW quality mark for gas	✗		
DVGW quality mark for water	✗		
KIWA certified	✗		
Type approval according to BBR/EKS	✗		