

START Waterproof Twin 1500 IP65 7100lm 840 0067956



Features

- Start Waterproof, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing, Polycarbonate diffuser, 7050 lm, 58 W, 122 lm/W, 4000 K, drive current 700 mA, Non dimmable, CRI80, IP65, IK08, Class I, nominal average life (h):50000, 1578 mm x 110 mm x 78 mm ,energy class: A++ A+ A, D-mark


Product Overview

Product name	START Waterproof Twin 1500 IP65 7100lm 840
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4306954
Fixture luminous flux (lm)	7050
Luminaire efficacy (lm/W)	122
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	58
Electrical protection	Class I
Control gear type	LED driver constant current
Housing colour	Grey

START Waterproof Twin 1500 IP65 7100lm 840 0067956

IP rating	IP65
IK rating	IK08
Product EAN number	5410288679563
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	7050

Photometry

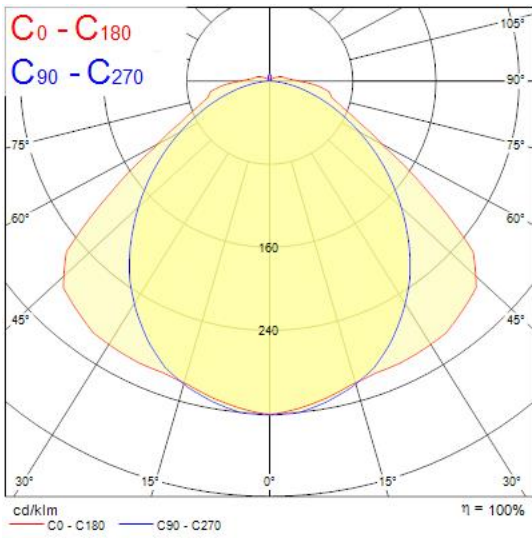

Technical drawings

