


## 18SKS-2005: Straight female adapter 20x3/4"

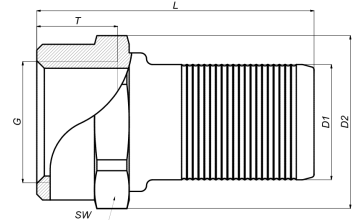

### Commercial information

The supply and feed-through of Henco plastic manifolds can be fitted with male (17SKS) or female (18SKS) straight adapters. These adapters are made from brass. Only combinations with Henco Vision push-fit fittings with a diameter of 20 or 26 mm are possible.

#### Basic unit dimensions

Height	36 mm
Length	53 mm
Width	36 mm
Net weight	0.093 kg

#### Certificates

KOMO

#### Applications

Potable water, Heating, Cooling, Sanitary

#### Solutions

Building installations, Industry, Utility

## Technical characteristics

Material connection 1	Brass	Bend radius	0 Millimetre
Material quality connection 1	CuZn40Pb2 (CW617N)	Outer pipe diameter connection 1	20 Millimetre
Surface protection connection 1	Untreated	Length	53 Millimetre
Surface treatment connection 1	Untreated	Wrench width	0 Millimetre
Material connection 2	Brass	Wrench width union nut	0 Millimetre
Material quality connection 2	CuZn40Pb2 (CW617N)	Medium temperature (continuous)	-10 70 Degrees celsius
Surface protection connection 2	Untreated	Max. operating pressure at 20 °C	10 Bar
Surface treatment connection 2	Untreated	Standard Dimension Ratio (SDR)	0
Shape	Straight		
Reducing	✘		
Eccentric	✘		
System specific	✓		
Connection 1	Soldered end		
Nominal diameter connection 2	3/4 inch (20)		
Connection 2	External thread conical BSPT-R (ISO 7-1 / EN 10226-1)		
Main colour fitting	Brass		
Material sealing	Ethylene-propylene diene monomer rubber (EPDM)		
With buffer stud	✓		
High tensile strength	✘		
With thermal insulation	✘		
Ring stiffness class	Other		
With sealing rings/gaskets	✘		
Capped	✘		
With drain valve	✘		
With de-aerator	✘		
FM quality mark	✘		
LPCB quality mark	✘		
ULC quality mark	✘		
UL quality mark	✘		
DIN-CERTCO certificate	✘		
VdS quality mark	✘		
With approval for TÜV	✘		
DVGW quality mark for gas	✘		
DVGW quality mark for water	✘		
KIWA certified	✘		
Gastec QA mark	✘		
KOMO certified	✓		
Type approval according to BBR/EKS	✘		