

# START Panel Flat UGR19 600x600

## START Panel Flat UGR19 600x600 840 SSH

### 0047040



#### Product features

- Edge lit LED flat panel. SYLSMART Connected Building - Fully wireless, adaptive, dynamic smart system. 32 W, Neutral White, 4000 K, 3500 lumens, 109 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, electronic driver. (HxWxD) 50 x 596 x 596 mm




## PRODUCT OVERVIEW

Product name	START Panel Flat UGR19 600x600 840 SSH
Technology	LED
Housing	Steel
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Useful luminous flux (Fuse)	3500
Fixture luminous flux (Im)	3500
Luminous flux (Im)	3450
Luminaire efficacy (Im/W)	109.3
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	32
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSH
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP40/20
IK rating	IK06
Product EAN number	5410288470405

## START Panel Flat UGR19 600x600

*START Panel Flat UGR19 600x600 840 SSH*  
0047040

### PHOTOMETRY

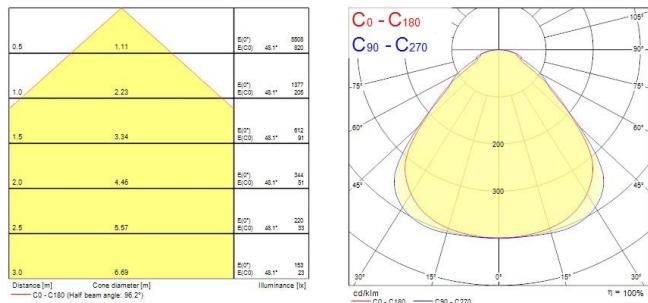

### TECHNICAL DRAWINGS

