


Muro Recessed Square

Muro Recessed Square IP66 450lm 830 Grey
2824200



Product features

- Recessed wall luminaire comes complete with recessing box and 30cm flying lead, aluminium housing in RAL7016 Anthracite grey colour, glass diffuser, IP66, IK08, Class I, 3000K, non-dimmable, 450lm, 9.5W, 47 lm/W, CRI80, Asymmetrical beam, 90000 hrs L80B20 lifespan, 185 x 185 x 100 mm (L x W x D) dimensions, 1.42 kg weight.

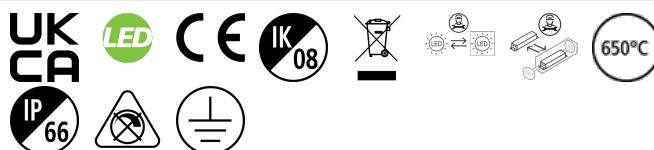


PRODUCT OVERVIEW

Product name	Muro Recessed Square IP66 450lm 830 Grey
Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Hospitality, Logistics & Industry, Museums & Galleries, Office
ETIM Class	EC002892
E-number FI	4579264
Warranty	5 years
Useful luminous flux (Fuse)	450
Fixture luminous flux (lm)	450
Luminaire efficacy (lm/W)	47
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG0
Total power consumption (W)	9.5
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Housing colour	RAL 7016 - Anthracite
IP rating	IP66
IK rating	IK08
Product EAN number	5025768242009

PHOTOMETRY

Muro Recessed Square

Muro Recessed Square IP66 450lm 830 Grey
2824200



TECHNICAL DRAWINGS

