


# Concord

## CONCORD BEACON MUSE TUNE DALI BLACK 2062908

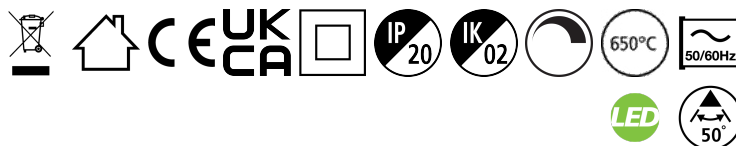

### Features

- Simple and slick integral design with no driver box and without any visible screws
- New technology utilization for improved performance
- Invisible in-track adaptor for an impressive architectural look
- Extremely precise light beams due to the high-quality lens
- #80mm die-cast aluminium body, Adjustable beam angle: between 10° - 50° , Textured black finishing colour
- Light color temperature: 2700 - 6500K, tunable white
- System power: 21W, Fixture lumen output: 235-760lm, efficacy: 36lm/W, Ra98 typical, LED chromacity: 2 step MacAdam ellipse LED source (SDCM2), IR/UV free light source without heat radiation
- Operating voltage 220-240V / 50-60Hz, DALI suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only
- Horizontal rotation: 355°, vertical tilt: 90°
- Nominal product dimensions: D.80mmx215mm
- 5 years warranty. Suitable for track mounting

### Product Overview

Cap/Base	N/A
Mount	Track mounting
General application	Hospitality, Museums & Galleries, Retail
ETIM Class	EC001744
Beam Angle (°)	50
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
IK rating	IK02


# Concord

## CONCORD BEACON MUSE TUNE DALI BLACK 2062908

Dimming method

DALI

### Photometry

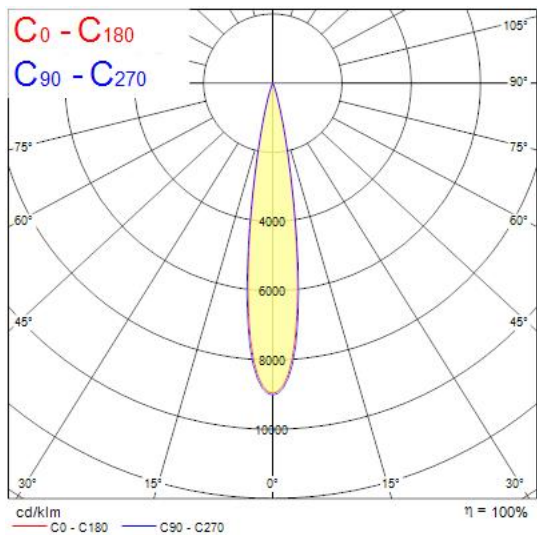

### Technical drawings

