

Start eco Surface Wall Round IP54
START eco Surface Wall Round IP54 880lm 830 WHT
0047933



Product features

- Exterior surface wall light luminaire, Round shape, white aluminium - RAL9016, 880lm, 12W, 73lm/W, 3000K, Driver Current: 60mA, CRI:80+, 220-240V, IP54, IK05, 30.000 hrs (L70), (HxWxD) 50x202x202mm, Class 1, energy class: A++, A+, A




PRODUCT OVERVIEW

Product name	START eco Surface Wall Round IP54 880lm 830 WHT
Technology	LED
Housing	Aluminium
Environment	External
General application	Residential & Consumer
ETIM Class	EC002892
Warranty	3 years
Useful luminous flux (Fuse)	880
Fixture luminous flux (lm)	880
Luminaire efficacy (lm/W)	73
Correlated colour temperature (k)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	12
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP54
IK rating	IK05
Product EAN number	5410288479330

PHOTOMETRY

Start eco Surface Wall Round IP54
START eco Surface Wall Round IP54 880lm 830 WHT
0047933

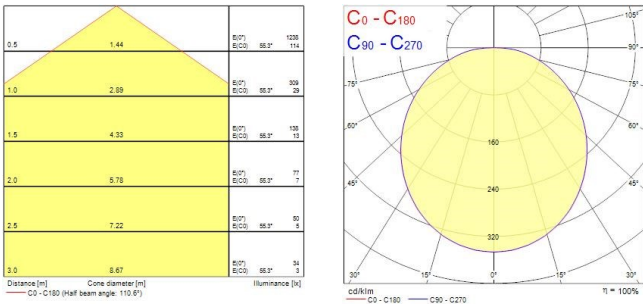

TECHNICAL DRAWINGS

