

Presence detector, 230 V, 16 m, round, for flush-mounting box, white

25460



4 year warranty


stand-alone


IP20


N.O. (max. 10 A)


5 lx – 2,000 lx


360°


14 m from a height of 3 m


2 m – 6 m


flush-mounting box



Presence detector 360° with a detection range of up to 16 m for flush-mounted ceiling installations, 1-channel.


Presence detector with strong detection performance, universally applicable thanks to various accessories, external switch (ON), lux sensor and remote control (optional). Ideal for offices and commercial applications.

Colour: white

Compatible secondary detectors:

Compatible master detectors:

Detection range

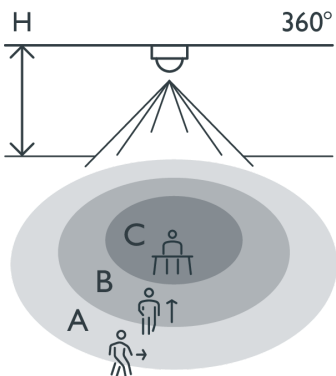

H	A Across	B Towards	C Presence
			
2 m	∅ 10 m	∅ 5 m	∅ 4 m
2.5 m	∅ 12 m	∅ 6 m	∅ 5 m
3 m	∅ 14 m	∅ 7 m	∅ 6 m
3.5 m	∅ 16 m	∅ 8 m	∅ 7 m
4 m	∅ 16 m	∅ 8 m	∅ (8) m
5 m	∅ 16 m	∅ 8 m	∅ (8) m
6 m	∅ 16 m	∅ 8 m	∅ (8) m


Technical features

Configuration	stand-alone
Input voltage	230 Vac
Detector output	230 V (ON/OFF)
Maximum current consumption	3.91 mA
Switch-off delay	10 sec – 1,200 sec
Maximum standby consumption	≤ 0,25 W
Maximum MCB rating	-10
Detection angle	360 °
Detection range (PIR)	14 m from a height of 3 m
Minimum ambient temperature	-20 °C
Maximum ambient temperature	+40 °C
Mounting method	flush-mounting box
Mounting height	2 m – 6 m
Colour	white
Dimensions visible (HxWxD)	105 mm x 105 mm x 35 mm
Dimensions (HxWxD)	105 mm x 105 mm x 71 mm
Protection degree standalone	IP20
Impact resistance	IK02
Modification of settings	Potentiometers or IR remote control

Accessories

350-41936	Universal remote control for smartphone
351-25320	IR remote control
351-25310	IR remote control for users
350-41936	Universal remote control for smartphone
351-25320	IR remote control
351-25420	Surface-mounting box, round, white

Dimensions

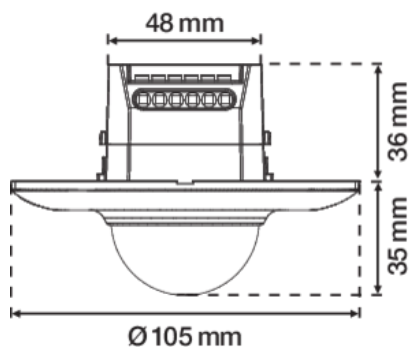

Wiring diagram

