


Spanish standard flush mounting enclosure IP40 with transparent door to house ICP power limiting circuit breaker. Sealable.

Insulation class	II	Rated current (A)	40
Outer dim. LxHxD (mm)	329x225x75	IP degree	IP40
Installation	Flush mounting enclosures	Mechanical resistance	IK07
Rated voltage (V)	400	R.U. 1407-D Classifications	CCE-ICP32
Door colour	Smoked Transparent	No. EN 50022 mod. ICP sect.	4
N. EN 50022 mod. CB section	8	Glow Wire Test	650 °C
Standard	IEC EN 60670-1; IEC EN 60670-24	Operating temperature	-15 ÷ +60 °C
Insulation voltage (Ui)	750 V	Thermo-pressure with ball	70 °C
Type of knockout holes	Removable with tool	Type of enclosure	GP
Dispersible power (W)	9+14		

#### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Not resistant	Limited resistance	Limited resistance	Not resistant	Limited resistance	Not resistant	Not resistant	Limited resistance	Limited resistance	Resistant

#### DIMENSIONAL

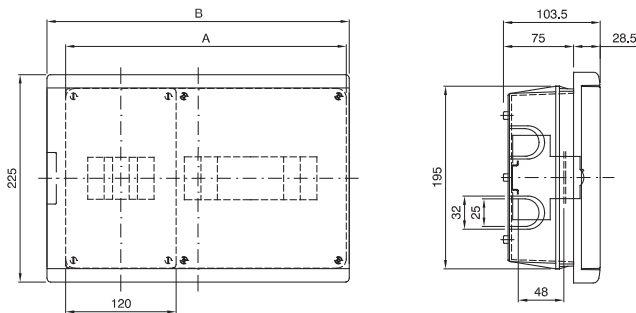

		A	B
4+8M	GW 40 336 GW 40 338	305	328,5
4+12M	GW 40 337 GW 40 339	372	400

#### TECHNICAL SYMBOLOGY



II

**IP**

IP40

**GWT**

650 °C



-15 ÷ +60 °C



70 °C



Removable with tool

#### STANDARDS/APPROVALS



IK07

GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09  
Company subject to the management and  
coordination of Polifin S.p.A.

www.gewiss.com  
sat@gewiss.com  
Last update 10/03/2026

Data, measures, designs and pictures are shown  
only as informative purposes,  
and could be changed without previous notice