


### Features

- 3hrs Self test Maintained emergency KIT with LiFePO4 battery compatible with Granit highbays (0039730 - 0039741; 0039749 - 0039760; 0038766 - 0038772; 0039766 - 0039772). Providing 800lm for 0-10V Granit and 1,200lm for DALI and SSA Granit. 0 to +50°C operating temperature range. Up to 7W consumption for charging the battery.

### Product Overview

Product name	Granit Self Test EM KIT
Technology	Accessory
General application	Logistics & Industry
ETIM Class	EC000471
Fixture luminous flux (lm)	N/A
IP rating	IP65
Product EAN number	5410288397832
Warranty	5 years

### Technical drawings

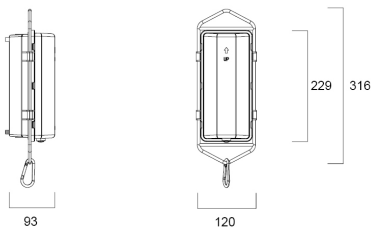

### Data table

#### GENERAL DATA

Product name	Granit Self Test EM KIT
Technology	Accessory
General application	Logistics & Industry
Operating temperature range (°C)	0°C...+50°C
ETIM Class	EC000471
Warranty	5 years

#### OPTICAL DATA

Fixture luminous flux (lm)	N/A
Emergency duration (h)	3

#### ELECTRICAL DATA

Control gear required	No
-----------------------	----

#### PHYSICAL DATA

IP rating	IP65
Weight (kg)	1.097

#### PACKAGING

Product EAN number	5410288397832
Packaging single length / height (cm)	42.0
Packaging single width (cm)	15.5
Packaging single depth (cm)	11.0
DUN14 (inner)	15410288397839
Units per outer package	6
Packaging outer length / height (cm)	44.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	34.0

## SAFETY DATA

---

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No