Product Environmental Profile

PrismaSeT XS - Modular enclosure - surface - 4 x 24 modules - 1 earth terminal block

Representative of all PrismaSet XS Enclosures from 1 to 6 rows and 13 to 24 modules










General information

Reference product	PrismaSeT XS - Modular enclosure - surface - 4 x 24 modules - 1 earth terminal block - LVSXL424
Description of the product	This PrismaSeT XS enclosure is a surface mounted distribution enclosure. It can accomodate all types of modular switchgear. This enclosure is dedicated to indoor installation. The IP degree of protection is IP40 closed door. This ready-to-use enclosure is intended in residental and tertiary sectors. The IK degree of protection is IK09 closed door. The total dimensions are (W) 550mm x (H) 750mm x (D) 168mm. The product weight is 14.180kg.
Description of the range	The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.Representative of all PrismaSet XS Enclosures from 1 to 6 rows and 13 to 24 modules
Functional unit	Protect people from direct contact with live active parts and ensure the grouping of control, command and protection devices in a single enclosure having the following dimensions 750 x 550 x 168 mm with rated current In 125 A, while protecting them against mechanical impacts (IK09) and the penetration of solid objects and liquids (IP40), according to the appropriate use scenario, and for the reference service life of the product of 20 years.
Specifications are:	H= 750mm L= 550 mm P= 168 mm Number of modules per row = 24 Number of horizontal row = 4 In=Rated current allowed in this enclosure is up to 125A IP=IP40 Degree of protection against ingress of solid foreign objects and water with harmful effects in accordance with the standard IEC 60529 IK= IK09 Degree of protection against external mechanical impacts in accordance with the standard IEC 62262 The Ui rated insulation voltage is 400V Type of current AC/DC

Constituent materials

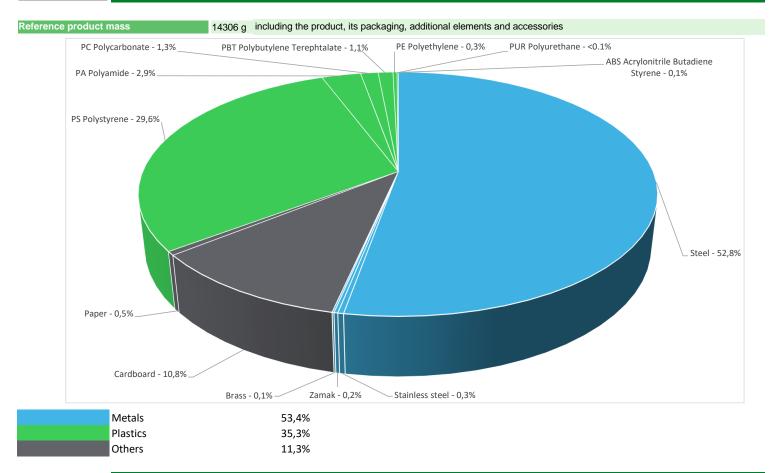

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric website $\underline{\text{https://www.se.com}}$



Additional environmental information

End Of Life

Recyclability potential:

59%

The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Environmental impacts

Reference service life time	20 years										
Product category	Unequipped enclosures										
Life cycle of the product	The manufacturing, the distribution, the installation, the use and the end of life were taken into consideration in this study										
Electricity consumtion	The electricity consumed during manufacturing pro a negligable consumption	The electricity consumed during manufacturing processes is considered for each part of the product individually, the final assembly generates a negligable consumption									
Installation elements	The product does not require any special installation procedure. Installation is done by manual labor. The possibly used portable electrical devices requires little energy during their usage for the installation process. No product scraps are generated during installation. The disposal of the packaging materials are accounted during the installation phase (including transport to disposal).										
Use scenario	There is no use scenario to be considered										
Time representativeness	The collected data are representative of the year 2	The collected data are representative of the year 2024									
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and représentaive of the actual type of technologies used to make the product.										
Geographical	Final assembly site Use phase End-of-life										
representativeness	Italy	Rest of the World Rest of the World									
Formula Island	[A1 - A3]	[A5]	[B6]	[C1 - C4]							
Energy model used	Electricity Mix; Low voltage; 2022; Italy, IT	Electricity Mix; Low voltage; 2022; Italy, IT No energy used No energy used Global, European and French datasets are used.									

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.se.com/contact

Mandatory Indicators		PrismaS	SeT XS - Modular e	enclosure - surfa	ce - 4 x 24 mod	ules - 1 earth term	inal block - LVS	XL424
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	9,64E+01	6,98E+01	2,78E+00	1,76E-01	0*	2,36E+01	-2,84E+01
Contribution to climate change-fossil	kg CO2 eq	9,92E+01	7,27E+01	2,78E+00	1,76E-01	0*	2,36E+01	-2,84E+01
Contribution to climate change-biogenic	kg CO2 eq	-2,85E+00	-2,89E+00	0*	0*	0*	0*	-6,30E-02
Contribution to climate change-land use and land use change	kg CO2 eq	2,73E-04	2,69E-04	0*	0*	0*	3,79E-06	0,00E+00
Contribution to ozone depletion	kg CFC-11 eq	1,17E-06	7,49E-07	4,27E-09	2,54E-09	0*	4,17E-07	-4,22E-06
Contribution to acidification	mol H+ eq	3,67E-01	2,77E-01	1,76E-02	8,54E-04	0*	7,10E-02	-1,68E-01
Contribution to eutrophication, freshwater	kg P eq	2,39E-04	2,06E-04	1,04E-06	3,08E-07	0*	3,12E-05	-4,33E-05
Contribution to eutrophication marine	kg N eq	8,00E-02	5,65E-02	8,27E-03	3,99E-04	0*	1,48E-02	-1,64E-02
Contribution to eutrophication, terrestrial	mol N eq	8,71E-01	6,06E-01	9,07E-02	4,10E-03	0*	1,70E-01	-1,92E-01
Contribution to photochemical ozone formation - human health	kg COVNM eq	2,60E-01	1,91E-01	2,29E-02	9,77E-04	0*	4,54E-02	-6,69E-02
Contribution to resource use, minerals and metals	kg Sb eq	4,04E-04	4,08E-04	1,10E-07	0*	0*	0*	-9,13E-03
Contribution to resource use, fossils	MJ	2,92E+03	2,70E+03	3,89E+01	7,40E-01	0*	1,82E+02	-6,68E+02
Contribution to water use	m3 eq	2,26E+01	1,96E+01	1,06E-02	1,57E-01	0*	2,83E+00	-1,22E+01

Inventory flows Indicators	PrismaSeT XS - Modular enclosure - surface - 4 x 24 modules - 1 earth terminal block - LVSXL424								
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads	
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,70E+01	8,60E+00	5,18E-02	0*	0*	8,35E+00	-5,28E+00	
Contribution to use of renewable primary energy resources used as raw material	MJ	4,44E+01	4,44E+01	0*	0*	0*	0*	0,00E+00	
Contribution to total use of renewable primary energy resources	MJ	6,14E+01	5,30E+01	5,18E-02	0*	0*	8,35E+00	-5,28E+00	
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2,69E+03	2,47E+03	3,89E+01	7,40E-01	0*	1,82E+02	-6,68E+02	
Contribution to use of non renewable primary energy resources used as raw material	MJ	2,30E+02	2,30E+02	0*	0*	0*	0*	0,00E+00	
Contribution to total use of non-renewable primary energy resources	MJ	2,92E+03	2,70E+03	3,89E+01	7,40E-01	0*	1,82E+02	-6,68E+02	
Contribution to use of secondary material	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to net use of freshwater	m³	5,39E-01	4,57E-01	2,46E-04	3,66E-03	0*	7,80E-02	-2,85E-01	
Contribution to hazardous waste disposed	kg	2,38E+01	2,37E+01	0*	0*	0*	8,41E-02	-7,21E+02	
Contribution to non hazardous waste disposed	kg	4,21E+01	2,56E+01	9,78E-02	1,64E+00	0*	1,47E+01	-2,35E+01	
Contribution to radioactive waste disposed	kg	1,60E-02	1,53E-02	6,96E-05	2,56E-06	0*	6,28E-04	-1,06E-02	
Contribution to components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to materials for recycling	kg	8,44E+00	9,69E-01	0*	0*	0*	7,47E+00	0,00E+00	
Contribution to materials for energy recovery	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to exported energy	MJ	8,35E-02	9,62E-03	0*	0*	0*	7,39E-02	0,00E+00	

 $^{^{\}ast}$ represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product \$kg\$ of C $$0,00E{+}00$$ Contribution to biogenic carbon content of the associated packaging \$kg\$ of C $$4,56E{-}01$$

^{*} The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

Mandatory Indicators	PrismaSeT XS - Modular enclosure - surface - 4 x 24 modules - 1 earth terminal block - LVSXL424							24		
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]	
Contribution to climate change	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to climate change-fossil	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to climate change-biogenic	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to climate change-land use and land use change	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to ozone depletion	kg CFC-11 eq	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to acidification	mol H+ eq	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to eutrophication, freshwater	kg P eq	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to eutrophication marine	kg N eq	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to eutrophication, terrestrial	mol N eq	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to photochemical ozone formation - human health	kg COVNM eq	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to resource use, minerals and metals	kg Sb eq	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to resource use, fossils	MJ	0*	0*	0*	0*	0*	0*	0*	0*	
Contribution to water use	m3 eq	0*	0*	0*	0*	0*	0*	0*	0*	

Inventory flows Indicators		PrismaS	eT XS -	Modular enclosı	ıre - surfa	ce - 4 x :	24 modul	es - 1 earth ter	minal block - LVSXL424
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of renewable primary energy resources	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of non renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of non-renewable primary energy resources	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of secondary material	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of non renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to net use of freshwater	m³	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to hazardous waste disposed	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to non hazardous waste disposed	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to radioactive waste disposed	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to components for reuse	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for recycling	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for energy recovery	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to exported energy	MJ	0*	0*	0*	0*	0*	0*	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.2.4, database version 2024-01 in compliance with ISO14044, EF3,1 method is applied, for biogenic carbon storage, assessment methodology -1/1 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-02078-V01.01-EN	Drafting rules	PCR-4-ed4-EN-2021 09 06						
		Supplemented by	PSR-0005-ed3.1-EN-2023 12 08						
Verifier accreditation N°	VH48	Information and reference documents	www.pep-ecopassport.org						
Date of issue	07-2025	Validity period	5 years						
Independent verification of the declaration and data, in compliance with ISO 14025 : 2006									

Internal External X

The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)

PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022

The components of the present PEP may not be compared with components from any other program.

Document complies with ISO 14025:2006 "Environmental labels and declarations. Type III environmental declarations"



Schneider Electric Industries SAS

Country Customer Care Center http://www.se.com/contact

Head Office

35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex RCS Nanterre 954 503 439

Capital social 928 298 512 €

SCHN-02078-V01.01-EN

www.se.com

Published by Schneider Electric

©2024 - Schneider Electric – All rights reserved

07-2025