




Color: ■ gray

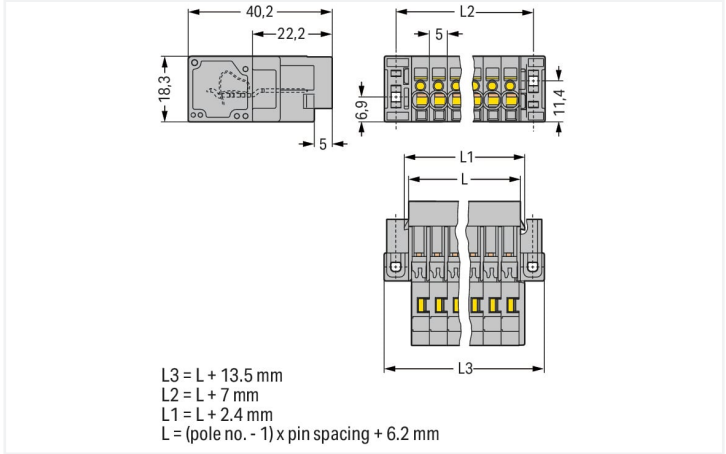

Dimensions in mm

**Electrical data**

| Ratings per IEC/EN            |                                                           |
|-------------------------------|-----------------------------------------------------------|
| Nominal voltage (III/3)       | 500 V                                                     |
| Rated impulse voltage (III/3) | 6 kV                                                      |
| Rated current                 | 32 A                                                      |
| Legend (ratings)              | (III / 3) Δ Overvoltage category III / Pollution degree 3 |

**Connection data**

|                            |   |
|----------------------------|---|
| Connection points          | 5 |
| Total number of potentials | 5 |

| Connection 1                    |                                   |
|---------------------------------|-----------------------------------|
| Connection technology           | CAGE CLAMP®                       |
| Actuation type                  | Operating tool                    |
| Connectable conductor materials | Copper                            |
| Nominal cross-section           | 4 mm² / 12 AWG                    |
| Solid conductor                 | 0.08 ... 4 mm² / 28 ... 12 AWG    |
| Fine-stranded conductor         | 0.08 ... 4 mm² / 28 ... 12 AWG    |
| Strip length                    | 8 ... 9 mm / 0.31 ... 0.35 inches |
| Pole number                     | 5                                 |
| Wiring direction                | Front-entry wiring                |

**Physical data**

|                         |                        |
|-------------------------|------------------------|
| Pin spacing             | 5 mm / 0.197 inches    |
| Width                   | 39.7 mm / 1.563 inches |
| Height from the surface | 18.3 mm / 0.72 inches  |
| Depth                   | 40.2 mm / 1.583 inches |

### Mechanical data

|                                                        |                    |
|--------------------------------------------------------|--------------------|
| Variable coding                                        | Yes                |
| Direct ground contact to DIN-rail/drilled hole/housing | No                 |
| Mounting type                                          | Feedthrough flange |
| Anti-rotation protection                               | Yes                |

### Plug-in connection

|                                    |                     |
|------------------------------------|---------------------|
| Contact type (pluggable connector) | Male connector/plug |
| Connector (connection type)        | for conductor       |
| Mismating protection               | No                  |

### Material data

|                             |                                                                                                                        |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------|
| Note (material data)        | <a href="https://www.wago.com/us/material-specifications">Information on material specifications can be found here</a> |
| Color                       | gray                                                                                                                   |
| Material group              | I                                                                                                                      |
| Insulation material         | Polyamide (PA66)                                                                                                       |
| Flammability class per UL94 | V0                                                                                                                     |
| Fire load                   | 0.451 MJ                                                                                                               |
| Weight                      | 16.4 g                                                                                                                 |

### Environmental requirements

|                                  |                 |
|----------------------------------|-----------------|
| Processing temperature           | -35 ... +85 °C  |
| Continuous operating temperature | -60 ... +105 °C |

### Commercial data

|                       |                   |
|-----------------------|-------------------|
| Product Group         | 18 (X-COM-System) |
| eCl@ss 10.0           | 27-14-11-06       |
| eCl@ss 9.0            | 27-14-11-06       |
| ETIM 8.0              | EC001284          |
| ETIM 7.0              | EC001284          |
| PU (SPU)              | 25 pcs            |
| Packaging type        | Box               |
| Country of origin     | PL                |
| GTIN                  | 4044918521116     |
| Customs tariff number | 85366930000       |

### Environmental Product Compliance

|                        |                         |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|



Approvals / Certificates

General approvals



| Approval                              | Standard  | Certificate Name |
|---------------------------------------|-----------|------------------|
| CCA<br>DEKRA Certification B.V.       | EN 60947  | NTR NL-7626      |
| CCA<br>DEKRA Certification B.V.       | EN 61984  | 2190419.02       |
| CCA<br>DEKRA Certification B.V.       | IEC 61984 | NL-47799/A1      |
| CSA<br>CSA Group                      | C22.2     | 1101144          |
| KEMA/KEUR<br>DEKRA Certification B.V. | EN 60947  | 2190419.01       |
| UL<br>Underwriters Laboratories Inc.  | UL 1977   | E 45171          |
| UR<br>Underwriters Laboratories Inc.  | UL 1059   | E45172           |

Declarations of conformity and manufacturer's declarations

| Approval                                                | Standard | Certificate Name |
|---------------------------------------------------------|----------|------------------|
| EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                |
| UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                |

Approvals for marine applications



| Approval                                              | Standard | Certificate Name |
|-------------------------------------------------------|----------|------------------|
| DNV GL<br>Det Norske Veritas, Ger-<br>manischer Lloyd | -        | TAE00001V2       |

Downloads

Environmental Product Compliance

| Compliance Search                                      |
|--------------------------------------------------------|
| Environmental Product<br>Compliance<br>769-605/004-000 |



Documentation

| Additional Information |
|------------------------|
| Technical Section      |

pdf  
2240.62 KB



| Bid Text        |            |                 |                   |
|-----------------|------------|-----------------|-------------------|
| 769-605/004-000 | 19.02.2019 | xml<br>3.24 KB  | <a href="#">↓</a> |
| 769-605/004-000 | 04.10.2017 | doc<br>25.00 KB | <a href="#">↓</a> |





| CAD/CAE-Data                                                                 |                                                                                                                                                                                                       |
|------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>CAD data</div> <div>2D/3D Models<br/>769-605/004-000</div> <div>↓</div> | <div>CAE data</div> <div>EPLAN Data Portal<br/>769-605/004-000</div> <div>↓</div> <div>WSCAD Universe<br/>769-605/004-000</div> <div>↓</div> <div>ZUKEN Portal<br/>769-605/004-000</div> <div>↓</div> |

1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket



|                                                                                                                                                   |                                                                                                                                                                                   |                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>Item No.: 769-105</div> <div>1-conductor female connector; CAGE CLAMP®; 4 mm²; Pin spacing 5 mm; 5-pole; coding finger; 4,00 mm²; gray</div> | <div>Item No.: 769-105/021-000</div> <div>1-conductor female connector; CAGE CLAMP®; 4 mm²; Pin spacing 5 mm; 5-pole; coding finger; Lateral locking levers; 4,00 mm²; gray</div> | <div>Item No.: 769-125</div> <div>2-conductor female connector; CAGE CLAMP®; 4 mm²; Pin spacing 5 mm; 5-pole; coding finger; 4,00 mm²; gray</div> |
|---------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|

1.2 Optional Accessories

1.2.1 Coding

1.2.1.1 Coding



|                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------|
| <div>Item No.: 769-435</div> <div>Coding pin; for coding of female plugs; for carrier terminal blocks / male connectors; orange</div> |
|---------------------------------------------------------------------------------------------------------------------------------------|

1.2.2 Ferrule

1.2.2.1 Ferrule



|                                                                                                                    |                                                                                                                                |                                                                                                                    |                                                                                                                                 |
|--------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <div>Item No.: 216-201</div> <div>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white</div> | <div>Item No.: 216-101</div> <div>Ferrule; Sleeve for 0.5 mm² / AWG 22; un-insulated; electro-tin plated; silver-colored</div> | <div>Item No.: 216-202</div> <div>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray</div> | <div>Item No.: 216-102</div> <div>Ferrule; Sleeve for 0.75 mm² / AWG 20; un-insulated; electro-tin plated; silver-colored</div> |
| <div>Item No.: 216-203</div> <div>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red</div>     | <div>Item No.: 216-103</div> <div>Ferrule; Sleeve for 1 mm² / AWG 18; un-insulated; electro-tin plated</div>                   | <div>Item No.: 216-204</div> <div>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black</div> | <div>Item No.: 216-104</div> <div>Ferrule; Sleeve for 1.5 mm² / AWG 16; un-insulated; electro-tin plated; silver-colored</div>  |



|                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------|
| <div>Item No.: 216-206</div> <div>Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; blue</div> |
|-------------------------------------------------------------------------------------------------------------------|

1.2.3 Insulation stop

1.2.3.1 Insulation stop



**Item No.: 769-470**  
Insulation stop; 0.08 - 0.2 mm² "s" (0.14 mm² "f-st"); 5 pieces/strip; white



**Item No.: 769-471**  
Insulation stop; 0.25 - 0.5 mm²; 5 pieces/strip; light gray



**Item No.: 769-472**  
Insulation stop; 0.75 - 1 mm²; 5 pieces/strip; dark gray

1.2.4 Marking

1.2.4.1 Marker



**Item No.: 248-501**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

1.2.4.2 Marking strip



**Item No.: 210-833**  
Marking strips; 25 m on roll; 6 mm wide; plain; Self-adhesive; white



**Item No.: 210-831**  
Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white



**Item No.: 210-832**  
Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white



**Item No.: 210-834**  
Marking strips; on reel; 5 mm wide; plain; Self-adhesive; white

1.2.5 Protective warning marker

1.2.5.1 Cover



**Item No.: 280-415**  
Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

1.2.6 Strain relief

1.2.6.1 Strain relief



**Item No.: 769-412**  
Strain relief plate; for female and male connectors; 1 part; Pin spacing 5 mm; 4- to 5-pole; gray

1.2.7 Tool

1.2.7.1 Operating tool



[Item No.: 210-490](#)  
Operating tool

[Item No.: 769-434](#)  
Operating tool; made of insulating material; 1-way; loose; white

Installation Notes

Conductor termination



Operating tool  
Inserting a conductor via operating tool (example shows a male connector).

Marking



Labeling a male connector with CAGE CLAMP® connection via Mini-WSB Quick Markers.