

### Features

- DELTAWING 1200 3K is a ceiling and wall surface, suspended LED luminaire with opal diffuser, 1160x160x60mm dimensions, 35W system power, 4,200lm flux and 120lm/W efficacy, CRi (Ra) >80, 3000K (Warm White) CCT, chromaticity tolerance of 3-step MacAdam ellipse, non-dimmable (4-steps DIP switch) driver (19W 2500lm, 24W 3100lm, 29W 3600lm, 35W 4200lm), RAL9003 finishing, L70B50 100khrs / L80B50 80khrs lifespan, IK06 impact resistance, IP44 ingress protection rating (in ceiling surface installation), Electrical protection Class I, Glow wire test 850°C.


### Product Overview

Product name	DELTAWING 1200 3K
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	PC Polycarbonate, Steel
Mount	Ceiling surface mounting, Wall surface mounted
General application	Education, Office, Logistics & Industry
ETIM Class	EC002892
Fixture luminous flux (lm)	4200
Luminaire efficacy (lm/W)	120
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	35
Electrical protection	Class I


## DELTAWING 1200 3K 0042916

Control gear type	LED driver constant current
Dimmable	No
Housing colour	RAL9003
IP rating	IP44
IK rating	IK06
Product EAN number	5410288429168
Warranty	5 years
Dimming method	N/A

### Photometry

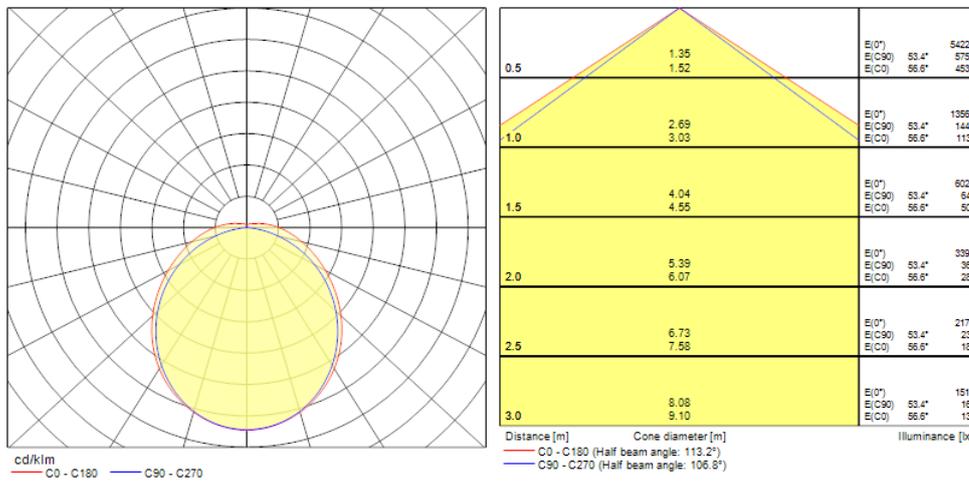

### Technical drawings

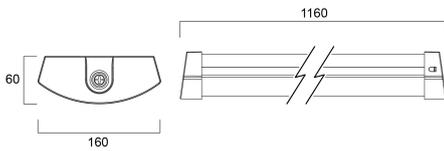

### Data table

## DELTAWING 1200 3K 0042916

### GENERAL DATA

Product name	DELTAWING 1200 3K
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	PC Polycarbonate, Steel
Mount	Ceiling surface mounting, Wall surface mounted
General application	Education, Office, Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC002892
Warranty	5 years

### OPTICAL DATA

Fixture luminous flux (lm)	4200
Luminaire efficacy (lm/W)	120
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Distribution type	Symmetric
Photobiological Risk Group	RG0

### ELECTRICAL DATA

Total power consumption (W)	35
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No

## DELTAWING 1200 3K 0042916

Dimming method	N/A
Drive current (mA)	350
Inrush Current (A)	30
Inrush Duration (µs)	190
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	22
Max. products per 16A C Breaker	35
Max. products per 16A B Breaker	35
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

### LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	80000

### PHYSICAL DATA

Housing colour	RAL9003
IP rating	IP44
IK rating	IK06
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1160
Nominal Product Width (mm)	160
Nominal Product Height (mm)	60
Weight (kg)	1.965

### PACKAGING

Product EAN number	5410288429168
Packaging single length / height (cm)	124.6
Packaging single width (cm)	16.5
Packaging single depth (cm)	6.6

DELTAWING 1200 3K

0042916

---

DUN14 (inner)	15410288429165
Units per outer package	4
Packaging outer length / height (cm)	126.0
Packaging outer width (cm)	34.5
Packaging outer depth (cm)	15.2

## SAFETY DATA

---

Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No