

### Features

- DELTAWING 1200 3K is a ceiling and wall surface, suspended LED luminaire with opal diffuser, 1160x160x60mm dimensions, 35W system power, 4,200lm flux and 120lm/W efficacy, CRi (Ra) >80, 3000K (Warm White) CCT, chromaticity tolerance of 3-step MacAdam ellipse, non-dimmable (4-steps DIP switch) driver (19W 2500lm, 24W 3100lm, 29W 3600lm, 35W 4200lm), RAL9003 finishing, L70B50 100khrs / L80B50 80khrs lifespan, IK06 impact resistance, IP44 ingress protection rating (in ceiling surface installation), Electrical protection Class I, Glow wire test 850°C.


### Product Overview

Product name	DELTAWING 1200 3K
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	PC Polycarbonate, Steel
Mount	Ceiling surface mounting, Wall surface mounted
General application	Education, Office, Logistics & Industry
ETIM Class	EC002892
Fixture luminous flux (lm)	4200
Luminaire efficacy (lm/W)	120
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	35
Electrical protection	Class I

## DELTAWING 1200 3K 0042916

Control gear type	LED driver constant current
Dimmable	No
Housing colour	RAL9003
IP rating	IP44
IK rating	IK06
Product EAN number	5410288429168
Warranty	5 years
Dimming method	N/A

### Photometry

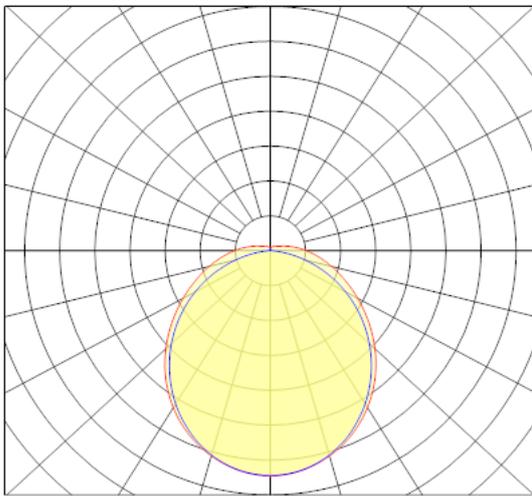

cd/klm  
C0 - C180 C90 - C270

### Technical drawings

