

### Features

• DELTAWING 1500 3K is a ceiling and wall surface, suspended LED luminaire with opal diffuser, 1440x160x60mm dimensions, 55W system power, 6,850lm flux and 125lm/W efficacy, CRi (Ra) >80, 3000K (Warm White) CCT, chromaticity tolerance of 3-step MacAdam ellipse, non-dimmable (4-steps DIP switch) driver (31W 4150lm, 39W 5200lm, 46W 5900lm, 55W 6850lm), RAL9003 finishing, L70B50 100khrs / L80B50 80khrs lifespan, IK06 impact resistance, IP44 ingress protection rating (in ceiling surface installation), Electrical protection Class I, Glow wire test 850°C.


### Product Overview

|                                   |  |
|-----------------------------------|--|
| Product name                      | DELTAWING 1500 3K                              |
| Technology                        | LED (3 SDCM)                                   |
| Cap/Base                          | N/A  |
| Housing                           | PC Polycarbonate, Steel                        |
| Mount                             | Ceiling surface mounting, Wall surface mounted |
| General application               | Education, Office, Logistics & Industry        |
| ETIM Class                        | EC002892                                       |
| Fixture luminous flux (lm)        | 6850   |
| Luminaire efficacy (lm/W)         | 125  |
| Correlated colour temperature (k) | 3000   |
| Light colour                      | Warm White                                     |
| CRI (Ra)                          | 80   |
| Colour Variation Initial (SDCM)   | 3  |
| Beam Angle (°)                    | 120  |
| Photobiological Risk Group        | RG0  |
| Total power consumption (W)       | 55   |
| Electrical protection             | Class I  |

## DELTAWING 1500 3K 0042918

|                    |                             |
|--------------------|-----------------------------|
| Control gear type  | LED driver constant current |
| Dimmable           | No                          |
| Housing colour     | RAL9003                     |
| IP rating          | IP44                        |
| IK rating          | IK06                        |
| Product EAN number | 5410288429182               |
| Warranty           | 5 years                     |
| Dimming method     | N/A                         |

### Photometry

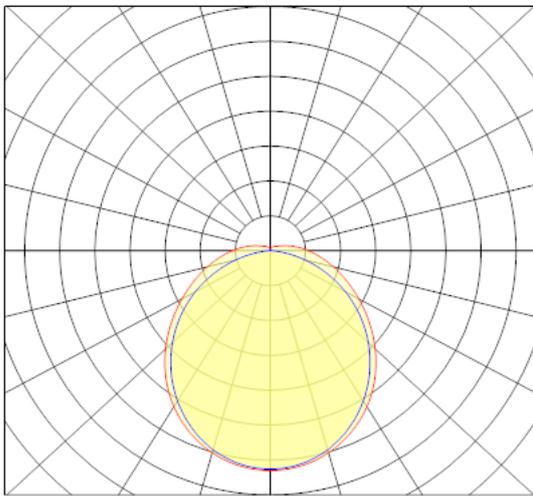

cd/klm  
— C0 - C180 — C90 - C270

### Technical drawings

