



Features

• Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Die-cast aluminium body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured white finishing colour Light color temperature: 4000K, natural white System power: 14W, Fixture lumen output: 1700lm, efficacy: 121lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, DALI dimmable driver, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.60mmx130mm 5 years warranty. Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal.


Product Overview

|                     |   |
|---------------------|---|
| Product name        | PIXO SMALL 1700LM 940 NB MB WB DALI WHITE                   |
| Technology          | LED   |
| Cap/Base            | N/A   |
| Housing             | Aluminium   |
| Mount               | Track mounting  |
| General application | Museums & Galleries, Retail, Office, Residential & Consumer |
| ETIM Class          | EC001744  |

PIXO SMALL 1700LM 940 NB MB WB DALI WHITE  
0004558

|                                   |                             |
|-----------------------------------|-----------------------------|
| E-number FI                       | 4279609                     |
| Fixture luminous flux (lm)        | 1700                        |
| Luminaire efficacy (lm/W)         | 121                         |
| Correlated colour temperature (k) | 4000                        |
| Light colour                      | Warm White                  |
| CRI (Ra)                          | 90                          |
| Colour Variation Initial (SDCM)   | 3                           |
| Photobiological Risk Group        | RG1                         |
| Total power consumption (W)       | 14                          |
| Electrical protection             | Class II                    |
| Control gear type                 | LED driver constant current |
| Dimmable                          | Yes                         |
| Housing colour                    | White                       |
| IP rating                         | IP20                        |
| IK rating                         | IK03                        |
| Product EAN number                | 5410288045580               |
| Warranty                          | 5 years                     |
| Dimming method                    | DALI-2                      |

Photometry

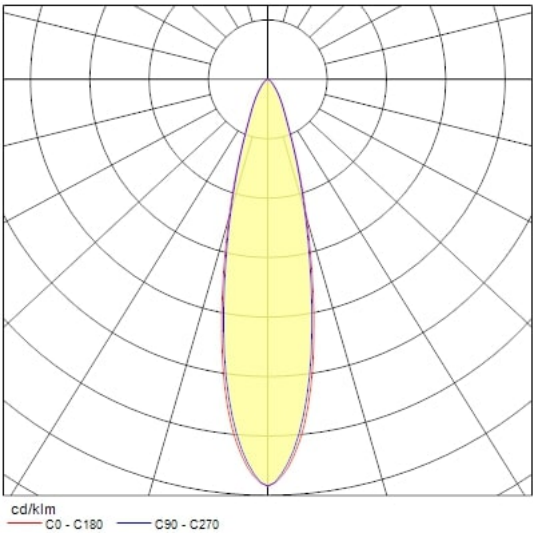

Technical drawings

