



### Features

- OPTIX RECESSED 1200 ASYMMETRIC 3000K SSC is a ceiling recessed LED Linear luminaire with Asymmetric Aluminium Reflector, Asymmetric Light Distribution, Luminaire Dimensions: 1196x293x52mm, Sylvania White body colour, IP20, IK07, SylSmart Standalone controlled, Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 3380lm, 31W, 109lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, lifespan: 58,000 hours L90B10.


### Product Overview

Product name	OPTIX RECESSED 1200 ASYMMETRIC 3000K SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Office, Education
ETIM Class	EC002892
Fixture luminous flux (lm)	3380
Luminous flux (lm)	3380
Luminaire efficacy (lm/W)	109
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	31
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)

## OPTIX RECESSED 1200 ASYMMETRIC 3000K SSC 2021684

Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5025768216840
Warranty	5 years
Dimming method	SylSmart SSC
Useful luminous flux (#use)	3380

### Photometry

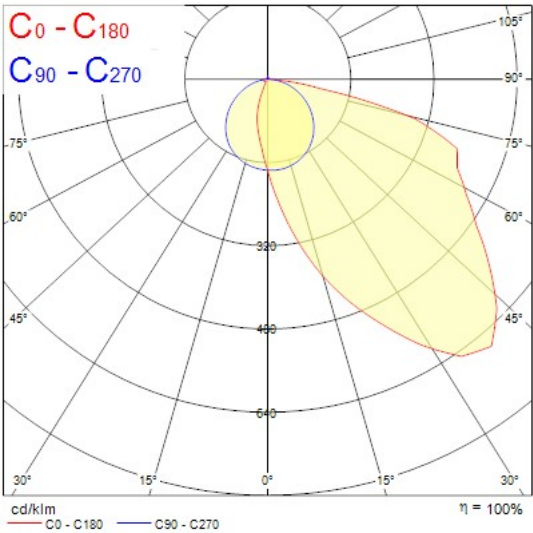

### Technical drawings

