


# Concord

## Solstice 200 2100lm 940 DALI Sandblast 2070417

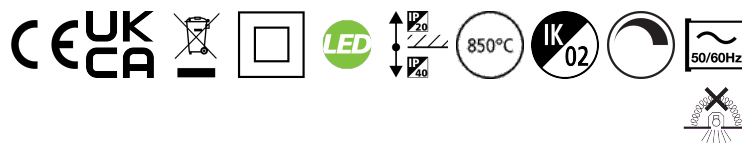

### Features

- Solstice 200 2100lm 940 DALI Sandblast is an efficient DALI dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 4000K Neutral White, Class II, Protection rating IP40/IP20, Cut out dimensions: 150mm.

### Product Overview


|                                 |  |
|---------------------------------|--|
| Product name                    | Solstice 200 2100lm 940 DALI Sandblast |
| Technology                      | LED                                    |
| Cap/Base                        | N/A                                    |
| Housing                         | Aluminium                              |
| Mount                           | Ceiling recessed mounting              |
| Fixture luminous flux (lm)      | 2100                                   |
| Luminaire efficacy (lm/W)       | 141                                    |
| LOR (%)                         | 124                                    |
| Colour temperature (K)          | 4000                                   |
| Light colour                    | Neutral White                          |
| CRI (Ra)                        | 90                                     |
| Colour Consistency (SDCM)       | 3                                      |
| Colour Variation Initial (SDCM) | 3                                      |
| Glare control                   | < 19                                   |
| Photobiological Risk Group      | RG1                                    |
| Total power consumption (W)     | 17                                     |
| Electrical protection           | Class II                               |
| Control gear type               | LED driver constant current            |
| LED Flickering Rate             | Ultra low (5% or less)                 |

# Concord

## Solstice 200 2100lm 940 DALI Sandblast 2070417

|                             |                                  |
|-----------------------------|----------------------------------|
| Housing colour              | RAL 9016 - Traffic white / Bezel |
| IP rating                   | IP40/20                          |
| IK rating                   | IK02                             |
| Product EAN number          | 5025768704170                    |
| Warranty                    | 5 years                          |
| Useful luminous flux (#use) | 2100                             |

### Photometry

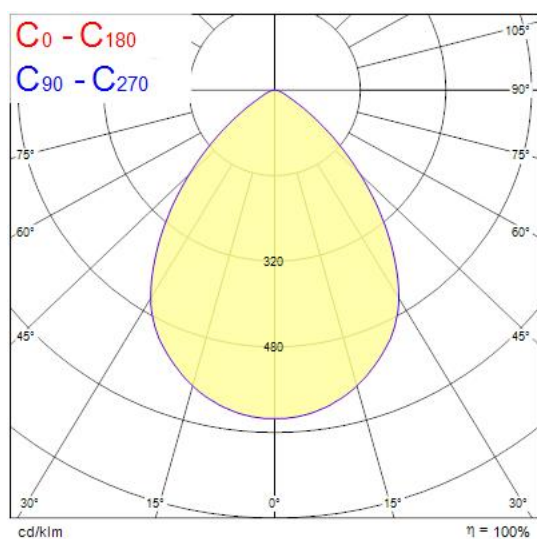

### Technical drawings

