


## Data Sheet | Item Number: 726-772

Matrix patchboard; 32-pole; Marking 33-64; Colors of modules: gray/white; for 19" racks; gray/white/dark gray

<https://www.wago.com/726-772>

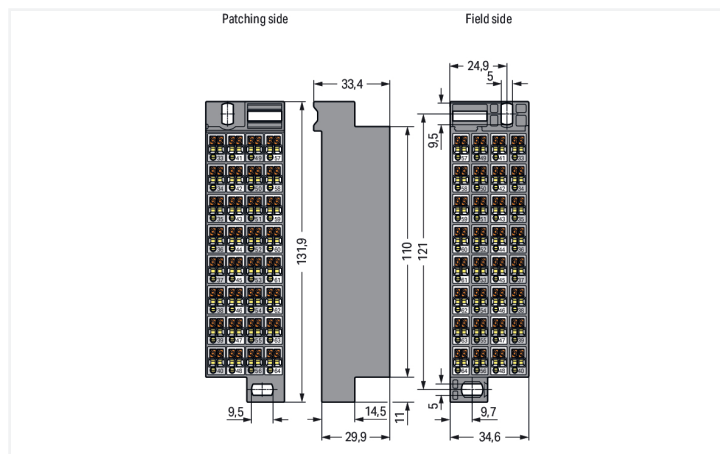

Color:  gray/white/dark gray

Similar to illustration

Dimensions in mm

### Matrix patchboards, 726 Series, Push-in CAGE CLAMP®

These matrix patchboards (item number 726-772) simplify electrical installations. Conductors should only be connected to these matrix patchboards if their strip length is 10 mm. This product incorporates conductor terminals and utilizes Push-in CAGE CLAMP®. Push-in CAGE CLAMP® technology provides a universal connection solution for any type of conductor. It allows both solid and fine-stranded conductors with ferrules to be inserted directly into the clamping point without the need for tools. Dimensions: (34.6 x 131.9 x 33.4) mm (width x height x depth). Depending on the conductor type, these matrix patchboards are ideal for conductor cross sections ranging from 0.2 mm<sup>2</sup> to 1.5 mm<sup>2</sup> on one side and for conductor cross sections from 0.2 mm<sup>2</sup> to 1.5 mm<sup>2</sup> on the other side.

#### Electrical data

##### Ratings per IEC/EN

Nominal voltage (III/3)	800 V
Rated impulse withstand voltage (III / 3)	8 kV
Rated current	10 A
Legend (ratings)	(III / 3) Δ Overvoltage category III / Pollution degree 3

##### General information

Wiring direction	Front-entry wiring
------------------	--------------------

#### Connection Data

##### Connection 1

Connection type	Page 1
Connection technology	Push-in CAGE CLAMP®
Number of connection points	2
Actuation type	Push-button
Connectable conductor materials	Copper
Solid conductor	0.2 ... 1.5 mm <sup>2</sup> / 24 ... 16 AWG
Fine-stranded conductor	0.08 ... 1.5 mm <sup>2</sup> / 28 ... 16 AWG
Fine-stranded conductor; with insulated ferrule	0.25 ... 1 mm <sup>2</sup> / 22 ... 18 AWG
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 1.5 mm <sup>2</sup> / 22 ... 16 AWG
Strip length	10 mm / 0.39 inches

##### Connection 1

Pole number	32
Wiring direction	Front-entry wiring

### Connection 2

Connection type	Side 2
Number of connection points	2
Solid conductor	0.2 ... 1.5 mm <sup>2</sup> / 24 ... 16 AWG
Fine-stranded conductor	0.2 ... 1.5 mm <sup>2</sup> / 24 ... 16 AWG
Fine-stranded conductor; with insulated ferrule	0.25 ... 1 mm <sup>2</sup> / 22 ... 18 AWG
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 1.5 mm <sup>2</sup> / 22 ... 16 AWG

### Physical data

Width	34.6 mm / 1.362 inches
Height	131.9 mm / 5.193 inches
Depth	33.4 mm / 1.315 inches

### Mechanical data

Marking	33 ... 64
Design	slimline

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	gray/white/dark gray
Module color	white/gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	1.472 MJ
Weight	124.8 g

### Commercial data

PU (SPU)	30 pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143573986
Customs tariff number	85369010000

### Product Classification

UNSPSC	39121410
ETIM 9.0	EC001604
ETIM 10.0	EC001604
ECCN	NO US CLASSIFICATION

**Environmental Product Compliance**

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

**Approvals / Certificates**

**General approvals** **Declarations of conformity and manufacturer's declarations**



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60998	NTR NL-7986
KEMA/KEUR DEKRA Certification B.V.	EN 60998	71-127356
UL UL International Germany GmbH	UL 1059	E45172

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

**Downloads**

**Environmental Product Compliance**

Compliance Search

Environmental Product Compliance 726-772	↓
--	---

**CAD/CAE-Data**

CAD data

2D/3D Models 726-772	↓
----------------------	---

**1 Compatible Products**

**1.1 Optional Accessories**

**1.1.1 Jumper**

**1.1.1.1 Jumper**



**Item No.: 709-107**  
Wire commoning chain; 0.5 mm<sup>2</sup>; insulated; gray

## 1.1.2 Marking

### 1.1.2.1 Marker



**Item No.: 793-5501/000-006**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue



**Item No.: 793-5501/000-014**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; brown



**Item No.: 793-5501/000-007**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray



**Item No.: 793-5501/000-023**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green



**Item No.: 793-5501/000-017**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green



**Item No.: 793-5501/000-012**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange



**Item No.: 793-5501/000-005**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red



**Item No.: 793-5501/000-024**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet



**Item No.: 793-5501**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white



**Item No.: 793-5501/000-002**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



**Item No.: 793-5500/793-035**

WMB marking card; as card; MARKED; X (100x); stretchable 5 - 5.2 mm; Horizontal marking; snap-on type; white



**Item No.: 2009-115**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

### 1.1.2.2 Marking strip



**Item No.: 2009-110**

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

## 1.1.3 Tool

### 1.1.3.1 Operating tool



**Item No.: 210-719**

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft