RANA LINEAR R 3KLM WW OPAL D

0052368



Features

• Ceiling recessed LED Linear luminaire with Opal diffuser, Dimensions: 1154mm x 90mm x 91mm, Direct, White Body, DALI Dimmable (Switch-Dim), Warm White LED (3000K), 3220lm, 31W, 104lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse), Low LED Flicker (+/-5%), UGR<23, L90B10 at 50,000 hours, Electric Class1, Glow Wire Test 850°C, Can be covered with building insulation of Glass wool type

Product Overview

Product name	RANA LINEAR R 3KLM WW OPAL D
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Environment	Internal
General application	Office, Education, Retail
ETIM Class	N/A
Fixture luminous flux (lm)	3220
Luminaire efficacy (lm/W)	104
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	31


Light your world

© Feilo Sylvania | Date Printed:02.10.2026

RANA LINEAR R 3KLM WW OPAL D
0052368

Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288523682
Warranty	5 years
Built in presence detector	NONE
Virtual assistant compatibility	N/A
Dimming method	DALI-2


Photometry

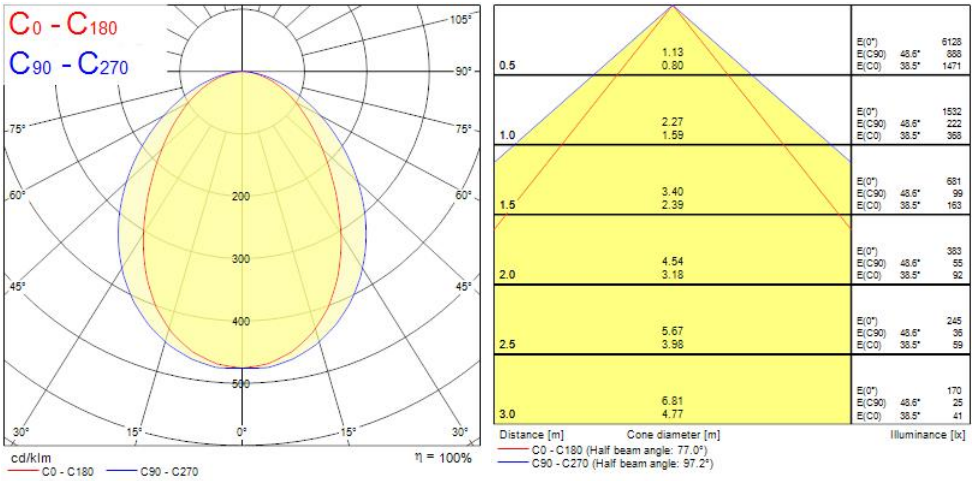


Light your world

RANA LINEAR R 3KLM WW OPAL D
0052368

Technical drawings

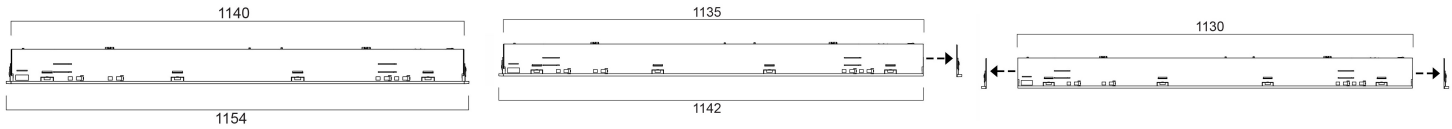

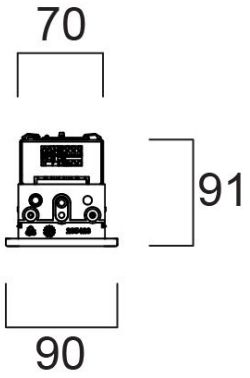

Data table

GENERAL DATA

Product name	RANA LINEAR R 3KLM WW OPAL D
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Built in presence detector	NONE
Fixture rating	Enclosed
Environment	Internal
General application	Office, Education, Retail

© Feilo Sylvania | Date Printed:02.10.2026

Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	N/A
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3220
Luminaire efficacy (lm/W)	104
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

ELECTRICAL DATA

Emergency type	Not Applicable
Total power consumption (W)	31
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.98
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	9
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Minimum dimming level (%)	1
Drive current (mA)	300

© Feilo Sylvania | Date Printed:02.10.2026

Inrush Current (A)	22.4
Inrush Duration (µs)	176
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

LIFETIME DATA

Lifespan L70 B50	60000
Lifespan L70 B20	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B20	60000
Lifespan L80 B10	60000
Lifespan L90 B50	60000
Lifespan L90 B20	60000
Lifespan L90 B10	60000

PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07

© Feilo Sylvania | Date Printed:02.10.2026

SYLVANIA

RANA LINEAR R 3KLM WW OPAL D
0052368

Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	Not Applicable
Nominal Product Length (mm)	1150
Nominal Product Width (mm)	90
Nominal Product Height (mm)	91
Weight (kg)	3.05
Recessed Depth (mm)	90

PACKAGING

Product EAN number	5410288523682
Packaging single length / height (cm)	117.0
Packaging single width (cm)	10.5
Packaging single depth (cm)	11.5
DUN14 (inner)	5410288523682
Units per outer package	1
Packaging outer length / height (cm)	117.0
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	11.5

SAFETY DATA

Glow Wire Test (°C)	850
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

Light your world

© Feilo Sylvania | Date Printed:02.10.2026