RANA LINEAR R 3KLM WW OPAL D
0052368



Features

• Ceiling recessed LED Linear luminaire with Opal diffuser, Dimensions: 1154mm x 90mm x 91mm, Direct, White Body, DALI Dimmable (Switch-Dim), Warm White LED (3000K), 3220lm, 31W, 104lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse), Low LED Flicker (+/-5%), UGR<23, L90B10 at 50,000 hours, Electric Class1, Glow Wire Test 850°C, Can be covered with building insulation of Glass wool type

Product Overview

Product name	RANA LINEAR R 3KLM WW OPAL D
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Environment	Internal
General application	Office, Education, Retail
ETIM Class	N/A
Fixture luminous flux (lm)	3220
Luminaire efficacy (lm/W)	104
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	31


Light your world

© Feilo Sylvania | Date Printed:02.10.2026


RANA LINEAR R 3KLM WW OPAL D
0052368

Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288523682
Warranty	5 years
Built in presence detector	NONE
Virtual assistant compatibility	N/A
Dimming method	DALI-2

Photometry

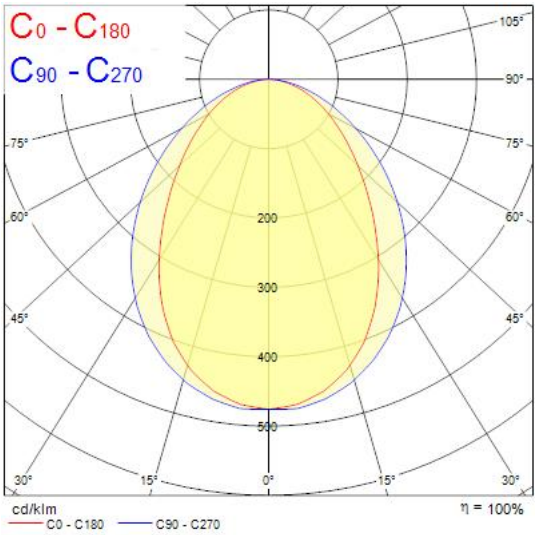

Technical drawings

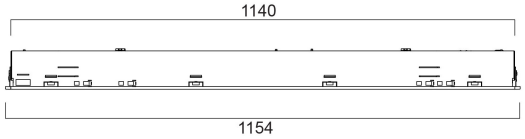

Light your world