


Presence detector, 230 V, 9.5 m, IP65, mini, for flush mounting, white


350-20085



4 year warranty

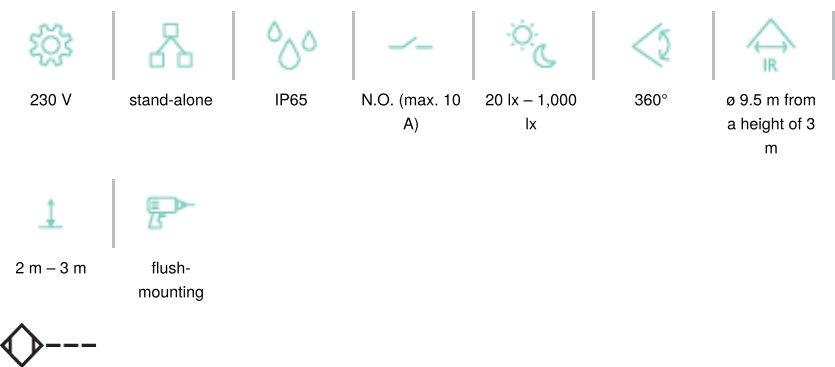

Detection range

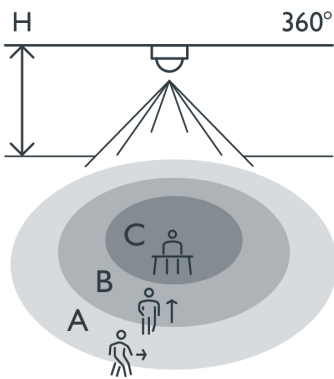

H	A Across	B Towards	C Presence
2 m	ø 6 m	ø 3 m	ø 2 m
2.5 m	ø 8 m	ø 3.7 m	ø 2.5 m
3 m	ø 9.5 m	ø 4.5 m	ø 3 m

Colour: white

This article is protected by at least one patent (or patent application). For more info on patents, see www.niko.eu/innovation.

- Very discreet thanks to its small dimensions
- Easy to mount thanks to its spring clamps
- Low power consumption (0.2 W)

- Water resistant (IP65)
- Circular detection zone up to 9.5 m

For use in small rooms such as storerooms, lofts, toilets, small offices, etc.

- Depending on the application selected:
- When a push button is used, the user can choose not to wait for the end of the switch-off delay and turn off the lighting when they leave the room (eco switch-off).
- The switch-off delay and the lux value at which the lighting must turn on can be set.
- The settings of the mini detector can only be modified using the optional IR remote control.


Technical features

Configuration	stand-alone
Input voltage	230 Vac
Detector output	230 V (ON/OFF)
Switch-off delay	2 min – 1 h
Maximum MCB rating	10 A
Detection angle	360 °
Detection range (PIR)	ø 9.5 m from a height of 3 m
Minimum ambient temperature	-5 °C
Maximum ambient temperature	+50 °C
Mounting method	flush-mounting
Mounting height	2 m – 3 m
Colour	white
Dimensions visible (HxWxD)	36 mm x 36 mm
Dimensions (HxWxD)	36 mm x 36 mm x 62.6 mm
Protection degree standalone	IP65
Certificates marks	CE

Accessories

350-41936	Universal remote control for smartphone
350-20090	IR remote control

Dimensions



Wiring diagram

