



Data Sheet | Item Number: 706-100/326-300

Connection cable; 26-pole; Pluggable connector per DIN 41651; open-ended;
Length: 3 m; Conductor cross-section: 0.14 mm²

<https://www.wago.com/706-100/326-300>

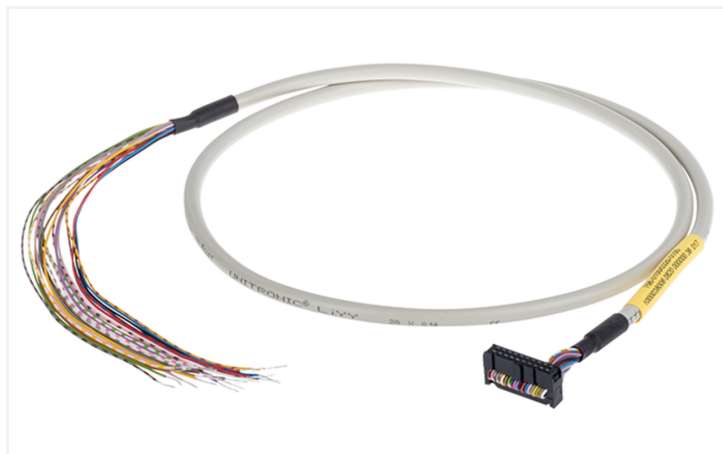

Similar to illustration

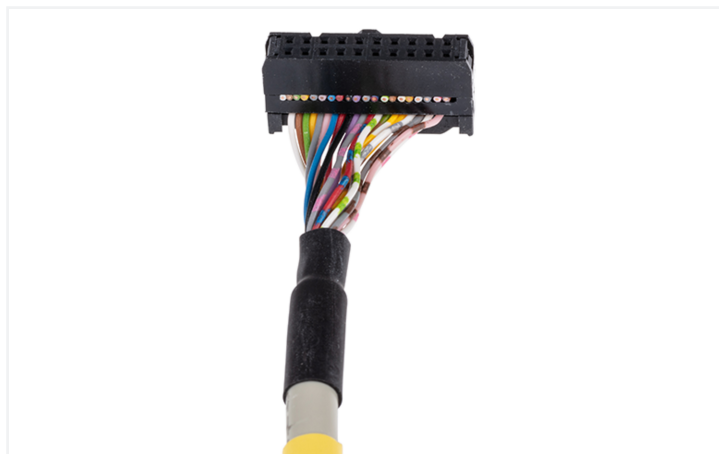

Similar to illustration

Color coding acc. to DIN VDE 47100	26 poles flat connector	
		Pin number
White		1
Brown		2
Green		3
Yellow		4
Grey		5
Pink		6
Blue		7
Red		8
Black		9
Violet		10
Grey-Pink		11
Red-Blue		12
White-Green		13
Brown-Green		14
White-Yellow		15
White-Brown		16
White-Grey		17
Grey-Brown		18
White-Pink		19
Pink-Brown		20
White-Blue		21
Brown-Blue		22
White-Red		23
Brown-Red		24
White-Black		25
Brown-Black		26

Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.
------	---

Electrical data

Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	1 A

Connection Data

Cable type	LiYY	Connection 1	
Color code	per DIN VDE 47100	Pluggable connector	Pluggable connector per DIN 41651; female connector
		Pole number 1	26
		Connection type	System
		Wire cross-section	0.14 mm ²

Connection 2

Connector	open-ended
Connection type	open-ended
Wire cross-section	0.14 mm ²

Physical data

Cable length	3 m
--------------	-----

Material data

Fire load	0 MJ
Weight	286 g

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

PU (SPU)	1 pcs
Packaging type	Box
Country of origin	FR
GTIN	4050821825449
Customs tariff number	85444290900

Product Classification

UNSPSC	26121629
ETIM 9.0	EC001855
ETIM 10.0	EC001855
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads**Environmental Product Compliance****Compliance Search**

Environmental Product
Compliance
706-100/326-300

