


Data Sheet | Item Number: 706-150/334-300

Connection cable; 34-pole; Pluggable connector per DIN 41651; 34-pole; Pluggable connector per DIN 41651; Length: 3 m; Conductor cross-section: 0.14 mm²

<https://www.wago.com/706-150/334-300>

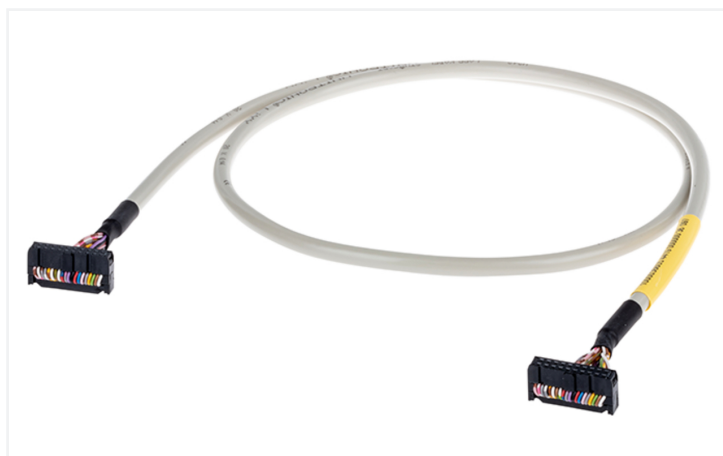

Color coding per DIN VDE 47100	34-pole/fst connector	Pin number
White		1
Brown		2
Green		3
Yellow		4
Grey		5
Pink		6
Blue		7
Red		8
Black		9
Violet		10
Grey-Pink		11
Red-Blue		12
White-Green		13
Brown-Green		14
White-Brown		15
Yellow-Brown		16
White-Grey		17
Grey-Brown		18
White-Black		19
Pink-Brown		20
White-Blue		21
Brown-Blue		22
White-Red		23
Brown-Red		24
White-Black		25
Brown-Black		26
Grey-Green		27
Yellow-Grey		28
Pink-Green		29
White-Pink		30
Green-Red		31
Yellow-Blue		32
Green-Red		33
Yellow-Red		34

Similar to illustration

Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Electrical data

Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	1 A

Connection Data

Cable type	LiYY
Color code	per DIN VDE 47100

Connection 1	
Pluggable connector	Pluggable connector per DIN 41651; female connector
Pole number 1	34
Connection type	System
Wire cross-section	0.14 mm ²

Connection 2

Connector	Pluggable connector per DIN 41651; female connector
Pole number	34
Connection type	System
Wire cross-section	0.14 mm ²

Physical data

Cable length	3 m
--------------	-----

Material data

Fire load	0 MJ
Weight	999 g

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

PU (SPU)	1 pcs
Packaging type	not specified
Country of origin	FR
GTIN	4050821835783
Customs tariff number	85444290900

Product Classification

UNSPSC	26121629
ETIM 9.0	EC001855
ETIM 10.0	EC001855
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads**Environmental Product Compliance****Compliance Search**

Environmental Product
Compliance
706-150/334-300

