


Data Sheet | Item Number: 706-150/316-200

Connection cable; 16-pole; Pluggable connector per DIN 41651; 16-pole; Pluggable connector per DIN 41651; Length: 2 m; Conductor cross-section: 0.14 mm²

<https://www.wago.com/706-150/316-200>

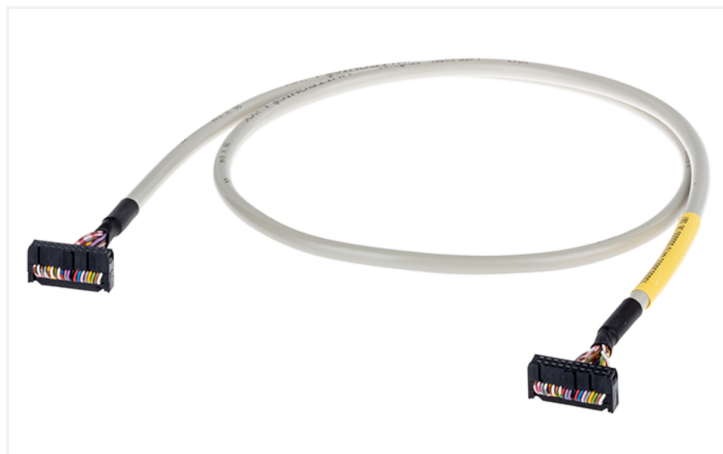

Color coding acc. to DIN VDE 47100		16 poles flat connector
		Pin number
White		1
Brown		2
Green		3
Yellow		4
Grey		5
Pink		6
Blue		7
Red		8
Black		9
Violet		10
Grey-Pink		11
Red-Blue		12
White-Green		13
Brown-Green		14
White-Yellow		15
Yellow-Brown		16

Similar to illustration

Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.
------	---

Electrical data

Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	1 A

Connection Data

Cable type	LiYY
Color code	per DIN VDE 47100

Connection 1

Pluggable connector	Pluggable connector per DIN 41651; female connector
Pole number 1	16
Connection type	System
Wire cross-section	0.14 mm ²

Connection 2

Connector	Pluggable connector per DIN 41651; female connector
Pole number	16
Connection type	System
Wire cross-section	0.14 mm ²

Physical data

Cable length	2 m
--------------	-----

Material data

Fire load	0 MJ
Weight	145 g

Environmental requirements

Ambient temperature (operation)	-25 ... +50 °C
---------------------------------	----------------

Commercial data

PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	FR
GTIN	4055143719148
Customs tariff number	85444290900

Product Classification

UNSPSC	26121604
ETIM 9.0	EC001855
ETIM 10.0	EC001855
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads**Environmental Product Compliance****Compliance Search**

Environmental Product
Compliance
706-150/316-200

