



# Data Sheet | Item Number: 706-100/609-300

Connection cable; 9-pole; with solder pin; Female connector; open-ended; Length: 3 m; Conductor cross-section: 0.25 mm<sup>2</sup>

<https://www.wago.com/706-100/609-300>

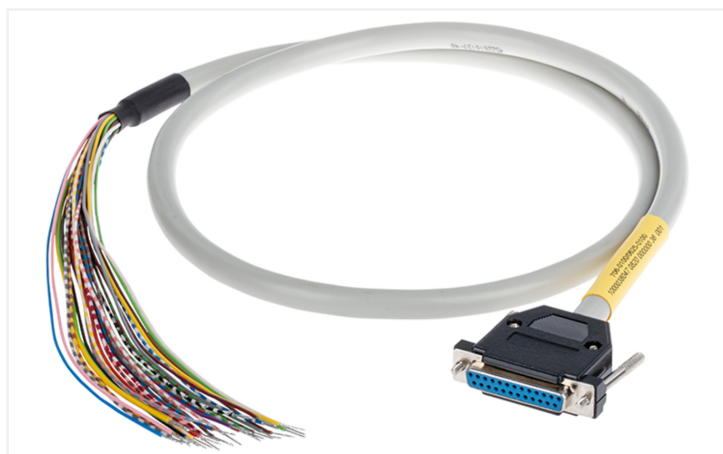

Similar to illustration

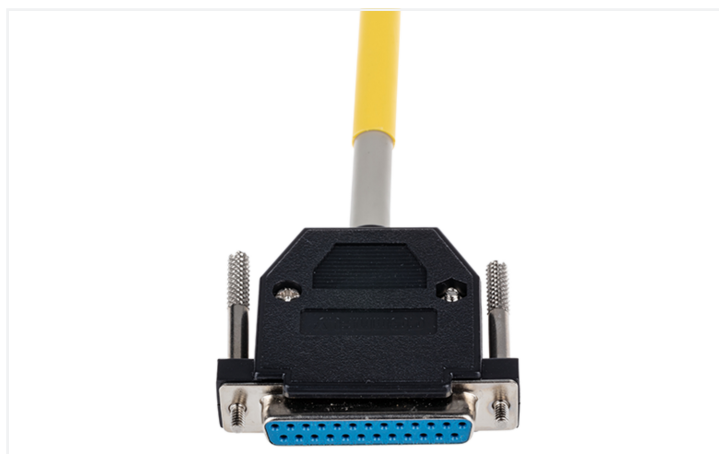

Similar to illustration

Color coding acc. to DIN VDE 47100		9 poles female Sub-D connector	
		Pin number	
White		1	
Brown		2	
Green		3	
Yellow		4	
Grey		5	
Pink		6	
Blue		7	
Red		8	
Black		9	
Shield		Connected to Sub-D	

## Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

## Electrical data

Operating voltage ≤ 35 VAC/VDC  
Current per wire (max.) 2 A

## Connection data

Cable type LiYCY  
Color code per DIN VDE 47100

### Connection 1

Pluggable connector D-subminiature female connector  
Pole number 1 9  
Connection type System  
Wire cross-section 0.25 mm<sup>2</sup>

**Connection 2**

Connector	open-ended
Connection type	open-ended
Wire cross-section	0.25 mm <sup>2</sup>

**Physical data**

Cable length	3 m
--------------	-----

**Material data**

Fire load	0 MJ
Weight	1.1 g

**Environmental requirements**

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

**Commercial data**

PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	FR
GTIN	4055143491099
Customs tariff number	85444290900

**Product Classification**

UNSPSC	26121604
ETIM 9.0	EC001855
ETIM 10.0	EC001855
ECCN	NO US CLASSIFICATION

**Environmental Product Compliance**

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

**Downloads****Environmental Product Compliance****Compliance Search**

Environmental Product  
Compliance  
706-100/609-300

