


Concord

OT H-Trk Ready Starter 940 DALI Wh H32S1405/w6-o-2 9200428

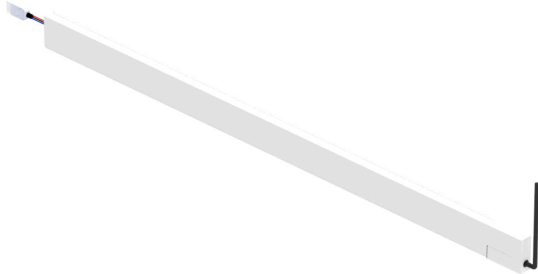

Features

- H-Track Ready Kit is a flexible linear track light system easy and fast to install, suitable for retail, museum, galleries, hospitality, and office environments. H-Track Ready Starter module - Complete with H-Track extruded aluminum body, LED light source, DALI control unit, quick connectors, opal diffuser and supply cable. H-Track Ready Starter kit supplied with live-end feed, prewired supply cable and a quick connector. Opal diffuser, diffuse light beam angle: 112°. Textured white finishing colour. Light color temperature: 4000K, natural white, Total system power: 34.5W. Fixture lumen output: 2850lm, efficacy: 83lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), low flicker, DALI dimmable driver. Track part made of extruded aluminum body and copper conductors -L1/L2/L3/Neutral/ground 16A/440V + D +/D- 2x1A/50V FELV AC (DALI). Suitable for direct or indirect installation. Compatible with OneTrack, and Lytespan H-Track accessories (installation accessories are excluded). Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only. Nominal product dimensions: L.1405mmx31.4mmx83mm

Product Overview


Product name	OT H-Trk Ready Starter 940 DALI Wh H32S1405/w6-o-2
Technology	LED
Cap/Base	N/A
Mount	Suspended
ETIM Class	EC002892
Fixture luminous flux (lm)	2850
Luminaire efficacy (lm/W)	83
LOR (%)	100

Concord

OT H-Trk Ready Starter 940 DALI Wh H32S1405/w6-o-2 9200428

Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	112
Photobiological Risk Group	RG0
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL9010
IP rating	IP20
IK rating	IK02
Product EAN number	4012289004286
Warranty	5 years
Built in presence detector	NONE
Dimming method	DALI-2
Colour Code	940

Photometry

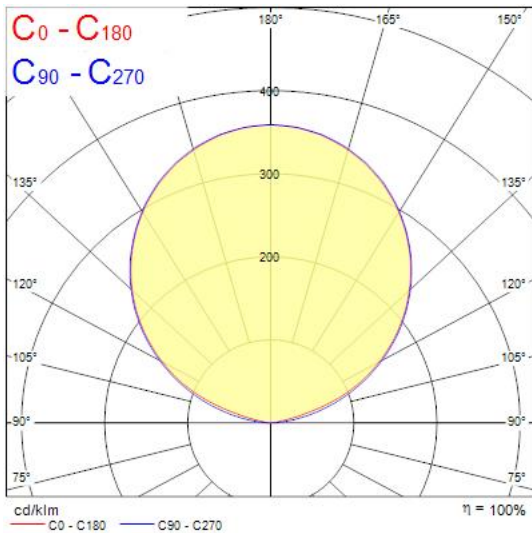

Technical drawings