



# Data Sheet | Item Number: 706-100/326-200

Connection cable; 26-pole; Pluggable connector per DIN 41651; open-ended;  
Length: 2 m; Conductor cross-section: 0.14 mm<sup>2</sup>

<https://www.wago.com/706-100/326-200>

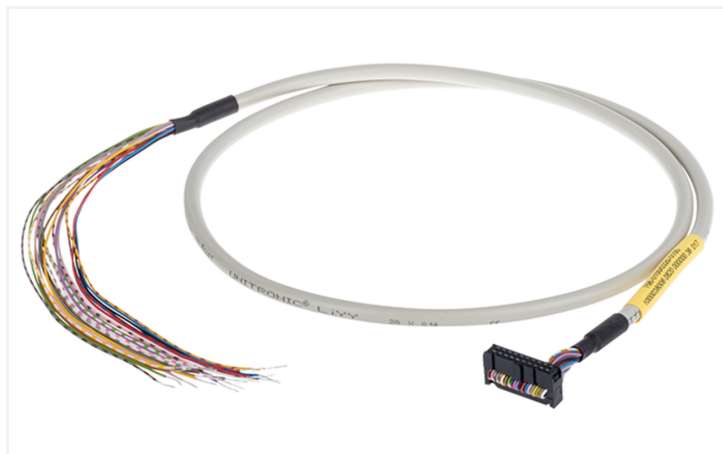

Similar to illustration

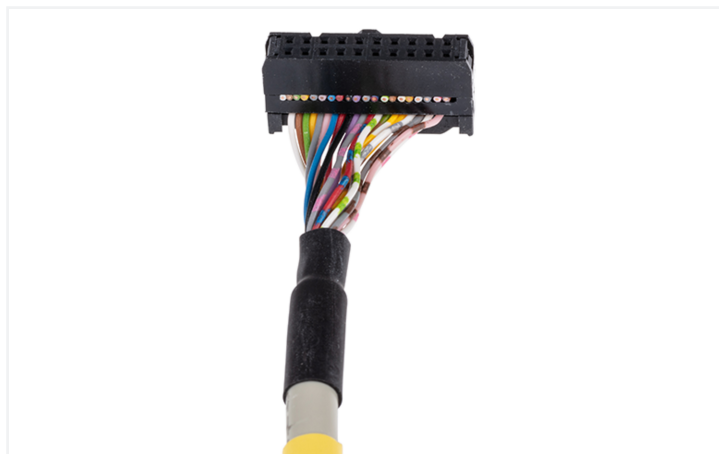

Similar to illustration

Color coding acc. to DIN VDE 47100	26 poles flat connector	
		Pin number
White		1
Brown		2
Green		3
Yellow		4
Grey		5
Pink		6
Blue		7
Red		8
Black		9
Violet		10
Grey-Pink		11
Red-Blue		12
White-Green		13
Brown-Green		14
White-Yellow		15
White-Brown		16
White-Grey		17
Grey-Brown		18
White-Pink		19
Pink-Brown		20
White-Blue		21
Brown-Blue		22
White-Red		23
Brown-Red		24
White-Black		25
Brown-Black		26

## Notes

### Note

When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

## Electrical data

Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	1 A

## Connection Data

Cable type	LiYY
Color code	per DIN VDE 47100

### Connection 1

Pluggable connector	Pluggable connector per DIN 41651; female connector
Pole number 1	26
Connection type	System
Wire cross-section	0.14 mm <sup>2</sup>

**Connection 2**

Connector	open-ended
Connection type	open-ended
Wire cross-section	0.14 mm <sup>2</sup>

**Physical data**

Cable length	2 m
--------------	-----

**Material data**

Fire load	0 MJ
Weight	237 g

**Environmental requirements**

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

**Commercial data**

PU (SPU)	1 pcs
Packaging type	Box
Country of origin	FR
GTIN	4050821777731
Customs tariff number	85444290900

**Product Classification**

UNSPSC	26121629
ETIM 9.0	EC001855
ETIM 10.0	EC001855
ECCN	NO US CLASSIFICATION

**Environmental Product Compliance**

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

**Downloads****Environmental Product Compliance****Compliance Search**

Environmental Product  
Compliance  
706-100/326-200

