


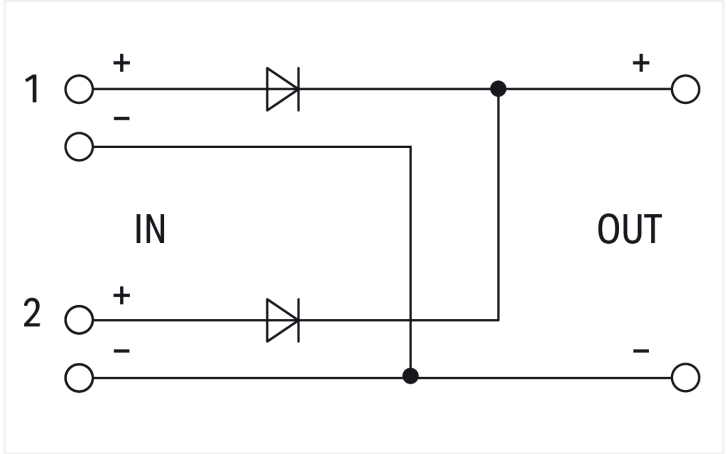

Features:

- Redundancy module with two inputs decouples two power supplies.
- For redundant and fail-safe power supply
- With LED for input voltage monitoring on site and remotely

Technical data

Input	
Nominal input voltage $U_{i\text{nom}}$	2 x 24 VDC
Input voltage range	2 x 9 ... 54 VDC
Nominal mains frequency range	0 Hz
Input current I_i	≤ 40 A (per path); ≤ 76 A (in total)

Output	
Nominal output voltage $U_{o\text{nom}}$	24 VDC
Output voltage range	9 ... 54 VDC (U_e – voltage drop)
Voltage drop	≤ 500 mV (Input/output)
Nominal output current $I_{o\text{nom}}$	40 A (redundancy operation); 76 A (Parallel operation); 65 A (Parallel operation [UL])
Nominal output power	1824 W
Output power (max.)	≤ 4104 W

Signaling and communication	
Signaling	1 x IN1 LED (green) 1 x IN2 LED (green) 1 x OUT LED (green)
Operation status indicator	2 x Green LED ($U_i > 7.5$ VDC) 1 x Green LED ($U_o > 7.5$ VDC)

Efficiency/power losses	
Power loss P_i	≤ 38 W (nominal load)
Efficiency (typ.)	97 %

Safety and protection	
Isolation voltage (connectors – housing)	0.5 kVDC
Protection class	III
Protection type	IP20; per EN 60529
Resistance to reverse feed	≤ 60 VDC
Pollution degree	2
Overvoltage protection; secondary	No
Short-circuit-protected	No
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	No
MTBF	> 10 million h (per IEC 61709)



Connection data

Connection 1	
Connection type 1	Input/output
Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 2716 Series
Solid conductor	1.5 ... 16 mm² / 16 ... 6 AWG
Fine-stranded conductor	1.5 ... 16 mm² / 16 ... 6 AWG
Strip length	12 ... 13 mm / 0.47 ... 0.51 inches

Physical data

Width	83 mm / 3.268 inches
Height	130 mm / 5.118 inches
Depth from upper-edge of DIN-rail	153 mm / 6.024 inches

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Fire load	0 MJ
Weight	992 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	≤ 95 % (no condensation permissible)
Derating	-2.66 %/K (55 °C < T _u ≤ 70 °C)
Climatic category	3K3 (per EN 60721; except for low air pressure)
Resistance to shock and vibration	Shock: 15g (per EN 60068-2-27)

Standards and specifications

Conformity marking	CE
Standards/specifications	UL 508

Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 9.0	EC002540
ETIM 8.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143036306
Customs tariff number	85044095900



Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Bulgaria)	75cbc6ca-380f-491f-9b29-12c9e6632df9
SCIP notification number (Czech Republic)	4969e245-4a19-46ff-9f47-4c2740f21a13

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
		
Approval	Standard	Certificate Name
UL	UL 508	E255817
Underwriters Laboratories Inc.		

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 787-785	

Documentation				
Bid Text			Instruction Leaflet	
787-785	15.07.2019	xml 5.59 KB		
787-785	15.07.2019	docx 21.63 KB		
			Diode Redundancy Module	V 1.2.0 29.09.2021
				pdf 283.98 KB
				

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 787-785	EPLAN Data Portal 787-785
	
	WSCAD Universe 787-785
	
	ZUKEN Portal 787-785
	