



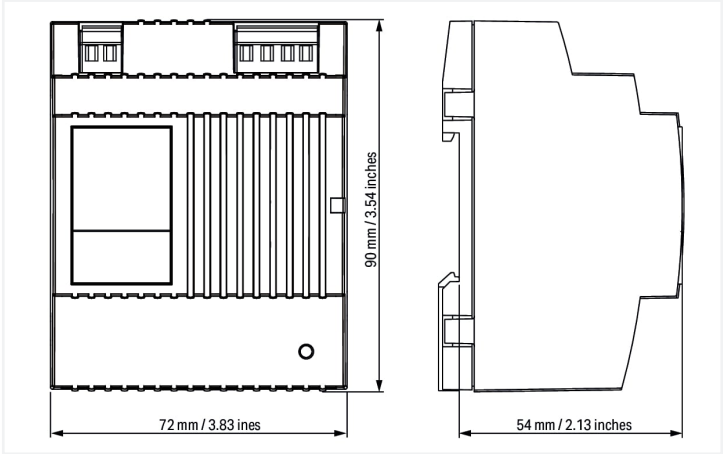

- Features:**
- Switched-mode power supply
 - Natural convection cooling when horizontally mounted
 - Stepped profile, ideal for distribution boards/boxes
 - Overhead mounting is possible with derating
 - Suitable for both parallel and series operation
 - Electrically isolated output voltage (SELV) per EN 61010-2-201/UL 60950-1; PELV per EN 60204

Technical data			
Input		Output	
Phases	1	Nominal output voltage $U_{o\,nom}$	18 VDC (SELV)
Nominal input voltage $U_{i\,nom}$	1 x 100 ... 240 VAC	Output voltage range	15 ... 28 VDC (adjustable)
Input voltage range	1 x 85 ... 264 VAC; 120 ... 300 VDC	Default Setting	DC 18 V
Input voltage derating	$I_o \leq 2\text{ A}$ ($< 100\text{ VAC}$)	Nominal output current $I_{o\,nom}$	2.4 A (18 VDC); 2 A (24 VDC; in horizontal mounting position)
Nominal mains frequency range	44 ... 66 Hz; 0 Hz	Nominal output power	43 W
Input current I_i	$\leq 0.5\text{ A}$ (230 VAC); $\leq 0.9\text{ A}$ (110 VAC)	Deviation	$\leq 2\%$
Discharge current	$\leq 1\text{ mA}$	Residual ripple	$\leq 100\text{ mV}$ (peak-to-peak)
Inrush current	$\leq 30\text{ A}$ (NTC)	Current limitation	$1.1 \times I_{o\,nom}$ (typ.)
Power factor correction (PFC)	Passive	Overload behavior	Constant current
Mains failure hold-up time	$\geq 10\text{ ms}$ (230 VAC); $\geq 10\text{ ms}$ (110 VAC)		

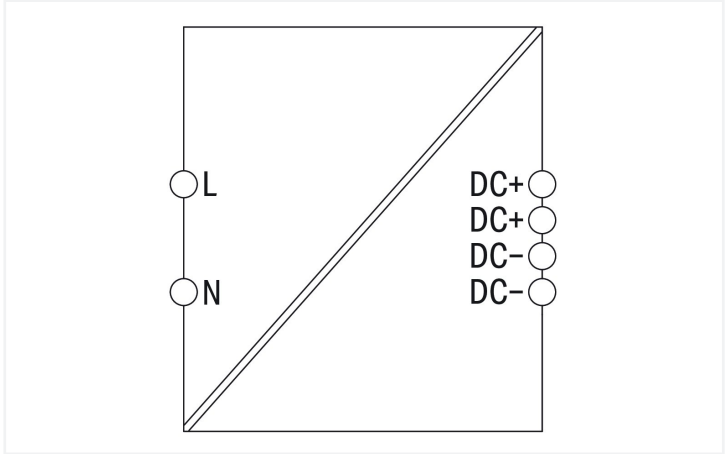

Signaling and communication	
Signaling	1 x Status indication LED (green)
Operation status indicator	Green LED (U _o)

Efficiency/power losses	
Power loss P _I	≤ 2.6 W; ≤ 8.1 W (230 VAC; nominal load)
Power loss (max.) P _{I(max)}	8.2 W (100 VAC / 18 VDC; 2.4 A)
Efficiency (typ.)	84 %

Circuit protection	
Internal fuse	T 2 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: 6 A (C characteristic), 10 A (B characteristic) or higher

Safety and protection	
Isolation voltage (pri.-sec.)	DC 4.242 kV
Protection class	II
Protection type	IP20; per EN 60529
Resistance to reverse feed	≤ 35 VDC
Overvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Overvoltage protection; secondary	≤ 40 VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	> 500,000 h (per IEC 61709)

Connection data	
Connection type 1	Input/output
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 740 Series
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Strip length	6 ... 7 mm / 0.24 ... 0.28 inches

Physical data	
Width	72 mm / 2.835 inches
Height	89 mm / 3.504 inches
Depth	59 mm / 2.323 inches
Depth from upper-edge of DIN-rail	55 mm / 2.165 inches

Mechanical data	
Housing design	DIN-rail-mount enclosure
Mounting type	DIN-35 rail



Material data	
Flammability class per UL94	V0
Fire load	0 MJ
Weight	264 g

Environmental requirements	
Ambient temperature (operation)	-25 ... +60 °C (device starts at -40 °C (type-tested))
Ambient temperature (storage)	-25 ... +80 °C
Ambient temperature UL (operation at U _N)	-25 ... +55 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	-3 %/K (> 45 °C)
Climatic category	3K3 (per EN 60721)

Standards and specifications	
Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204-3 UL 60950-1 UL 508

Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 9.0	EC002540
ETIM 8.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821595731
Customs tariff number	85044083900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates											
General approvals		Declarations of conformity and manufacturer's declarations									
  											
Approval	Standard	Certificate Name									
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03078									
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081									
UL Underwriters Laboratories Inc.	UL 508	E255817									
UR Underwriters Laboratories Inc.	UL 60950-1	E255815									
		<table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>EU-Declaration of Confor- mity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr><tr><td>UK-Declaration of Confor- mity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr></table>	Approval	Standard	Certificate Name	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
Approval	Standard	Certificate Name									
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-									
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-									



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 787-1017			

Documentation

Bid Text			
787-1017	12.06.2019	docx 20.95 KB	
787-1017	24.06.2019	xml 6.99 KB	

Instruction Leaflet			
Power Supply COM-PACT	29-03-2021 20.12.2021	pdf 2143.15 KB	

CAD/CAE-Data

CAD data	
2D/3D Models 787-1017	

CAE data	
EPLAN Data Portal 787-1017	
WSCAD Universe 787-1017	
ZUKEN Portal 787-1017	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 210-831
Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white



Item No.: 210-832
Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white

1.1.2 Tool

1.1.2.1 Operating tool



Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured



Item No.: 210-769
SCREWDRIVER; green