


Data Sheet | Item Number: 706-100/320-100

Connection cable; 20-pole; Pluggable connector per DIN 41651; open-ended;
Length: 1 m; Conductor cross-section: 0.14 mm²

<https://www.wago.com/706-100/320-100>

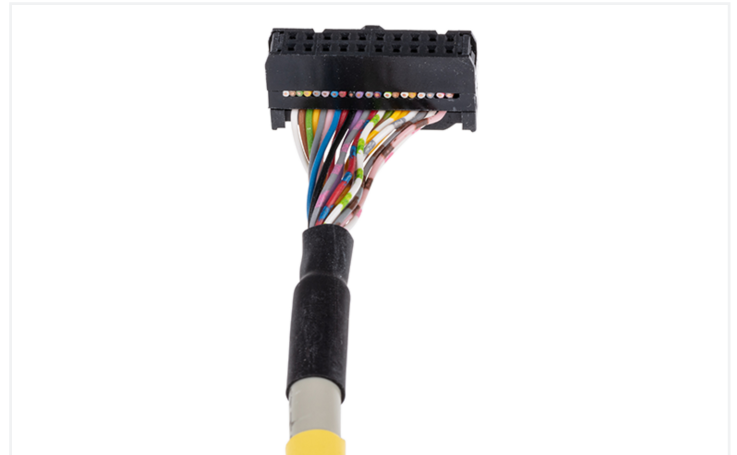

Color coding acc. to DIN VDE 47100	20 poles flat connector	
		Pin number
White		1
Brown		2
Green		3
Yellow		4
Grey		5
Pink		6
Blue		7
Red		8
Black		9
Violet		10
Grey-Pink		11
Red-Blue		12
White-Green		13
Brown-Green		14
White-Yellow		15
Yellow-Brown		16
White-Grey		17
Grey-Brown		18
White-Pink		19
Pink-Brown		20

Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Electrical data

Operating voltage ≤ 35 VAC/VDC

Current per wire (max.) 1 A

Compatibility

Omron

Omron CJ1W CJ1W-ID211
CJ1W-IDP01
CJ1W-INT01
CJ1W-OD212

Connection Data

Cable type	LiYY
Color code	per DIN VDE 47100

Connection 1

Pluggable connector	Pluggable connector per DIN 41651; female connector
Pole number 1	20
Connection type	System
Wire cross-section	0.14 mm ²

Connection 2

Connector	open-ended
Connection type	open-ended
Wire cross-section	0.14 mm ²

Physical data

Cable length	1 m
--------------	-----

Material data

Fire load	0 MJ
Weight	109 g

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	FR
GTIN	4055143372770
Customs tariff number	85444290900

Product Classification

UNSPSC	26121629
ETIM 9.0	EC001855
ETIM 10.0	EC001855
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance
706-100/320-100

