

### Features

• Simple and slick integral design with no driver box and without any visible screws  
New technology utilization for improved performance  
Invisible in-track adaptor for an impressive architectural look  
Extremely precise light beams due to the high-quality lens  
#80mm die-cast aluminium body, Adjustable beam angle: between 8° - 55° , Textured black finishing colour  
Light color temperature: 2700K, candle light  
System power: 18W, Fixture lumen output: 940lm, efficacy: 52lm/W, Ra97 typical, LED chromacity: 2 step MacAdam ellipse LED source (SDCM2), IR/UV free light source without heat radiation  
Operating voltage 220-240V / 50-60Hz, dimmable via on-board potentiometer, suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack  
Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only  
Horizontal rotation: 355°, vertical tilt: 90°  
Nominal product dimensions: D.80mmx215mm  
5 years warranty. Suitable for track mounting


### Product Overview

|                            |                                          |
|----------------------------|------------------------------------------|
| Product name               | CONCORD BEACON MUSE 2700K O/B DIM BLACK  |
| Technology                 | LED                                      |
| Cap/Base                   | N/A                                      |
| Housing                    | Aluminium                                |
| Mount                      | Track mounting                           |
| Fixture rating             | Enclosed                                 |
| General application        | Museums & Galleries, Retail, Hospitality |
| ETIM Class                 | EC001744                                 |
| E-number FI                | 4170388                                  |
| Fixture luminous flux (lm) | 940                                      |
| Luminaire efficacy (lm/W)  | 52                                       |

## CONCORD BEACON MUSE 2700K O/B DIM BLACK 2062562

|                                   |                             |
|-----------------------------------|-----------------------------|
| LOR (%)                           | 100                         |
| Correlated colour temperature (k) | 2700                        |
| Light colour                      | Candlelight                 |
| CRI (Ra)                          | 97                          |
| Colour Variation Initial (SDCM)   | 2                           |
| Photobiological Risk Group        | RG1                         |
| Total power consumption (W)       | 18                          |
| Electrical protection             | Class II                    |
| Control gear type                 | LED driver constant current |
| Dimmable                          | Yes                         |
| Minimum dimming level (%)         | 1                           |
| Housing colour                    | RAL9005                     |
| IP rating                         | IP20                        |
| IK rating                         | IK02                        |
| Product EAN number                | 5025768625628               |
| Warranty                          | 5 years                     |
| Dimming method                    | Onboard pot                 |

### Photometry

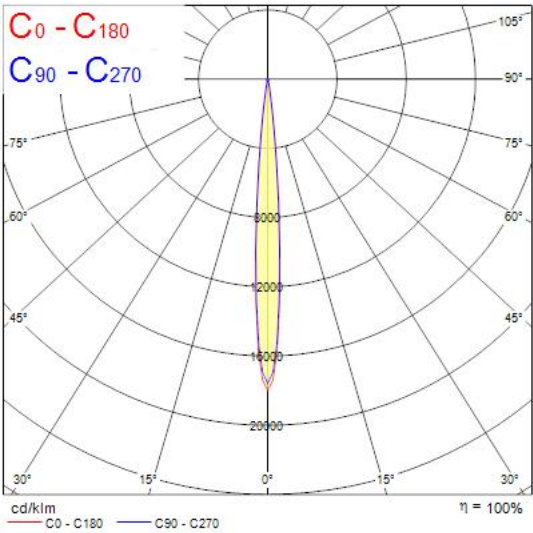

### Technical drawings

