


# Concord

OT H-Trk Ready Starter 930 DALI Wh H32S1405/w5-o-2  
9200424

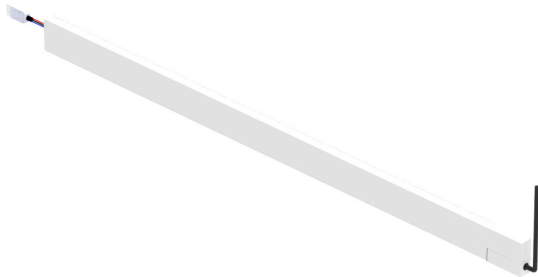

## Features

• H-Track Ready Kit is a flexible linear track light system easy and fast to install, suitable for retail, museum, galleries, hospitality, and office environments. H-Track Ready Starter module - Complete with H-Track extruded aluminum body, LED light source, DALI control unit, quick connectors, opal diffuser and supply cable. H-Track Ready Starter kit supplied with live-end feed, prewired supply cable and a quick connector. Opal diffuser, light beam angle: 112° Textured white finishing colour. Light color temperature: 3000K, warm white, Total system power: 34.5W, Fixture lumen output: 2615lm, efficacy: 76lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), low flicker, DALI dimmable driverTrack part made of extruded aluminum body and copper conductors -L1/L2/L3/Neutral/ground 16A/440V + D +/D- 2x1A/50V FELV AC (DALI). Suitable for direct or indirect installation. Compatible with OneTrack, and Lytespan H-Track accessories (installation accessories are excluded). Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only. Nominal product dimensions: L.1405mmx31.4mmx83mm

## Product Overview


|                            |  |
|----------------------------|--|
| Product name               | OT H-Trk Ready Starter 930 DALI Wh H32S1405/w5-o-2 |
| Technology                 | LED  |
| Cap/Base                   | N/A  |
| Mount                      | Suspended  |
| ETIM Class                 | EC002892   |
| Fixture luminous flux (lm) | 2615   |
| Luminaire efficacy (lm/W)  | 76   |
| LOR (%)                    | 100  |

# Concord

## OT H-Trk Ready Starter 930 DALI Wh H32S1405/w5-o-2 9200424

|                                 |                             |
|---------------------------------|-----------------------------|
| Light colour                    | Warm White                  |
| CRI (Ra)                        | 90                          |
| Colour Variation Initial (SDCM) | 3                           |
| Beam Angle (°)                  | 112                         |
| Photobiological Risk Group      | RG0                         |
| Electrical protection           | Class I                     |
| Control gear type               | LED driver constant current |
| Dimmable                        | Yes                         |
| Housing colour                  | RAL9010                     |
| IP rating                       | IP20                        |
| IK rating                       | IK02                        |
| Product EAN number              | 4012289004248               |
| Warranty                        | 5 years                     |
| Built in presence detector      | NONE                        |
| Dimming method                  | DALI-2                      |
| Colour Code                     | 930                         |

### Photometry

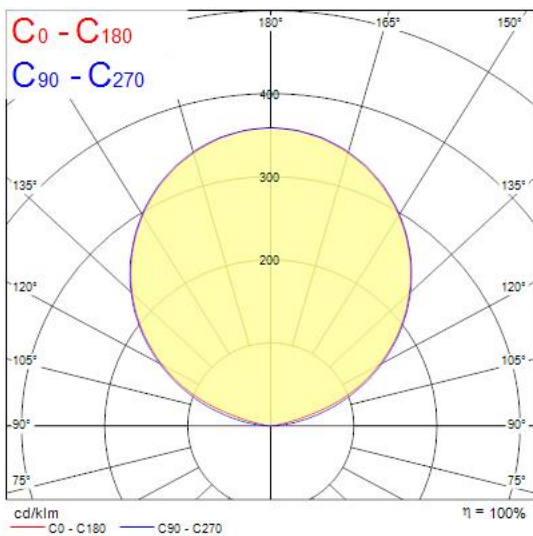

### Technical drawings

