

27 803 660 Product version from 8/1/2018 to 6/3/2020



- COMPACT RAIN, max. flow rate 15 l/min (at 3 bar)
- three settings: normal flow, soft flow, massage flow
- with anti-scale system
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection
- rosette Ø 60 mm
- 1/2" connection
- Function from: 7 l/min

Intrinsic protection against back flow.

Recommended miscellaneous



- Concealed wall elbow -**
- min. recess depth 90 mm
  - max. recess depth 163 mm

35 085 970 90

Recommended miscellaneous




- Concealed wall elbow -**
- min. recess depth 90 mm
  - max. recess depth 163 mm


35 085 970 90

27 803 660 Product version from 8/1/2018 to 6/3/2020

mm [inches]

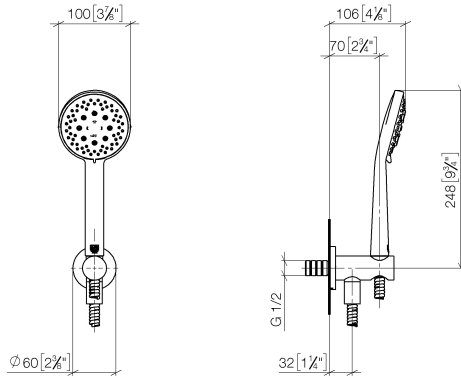

Flow rate chart

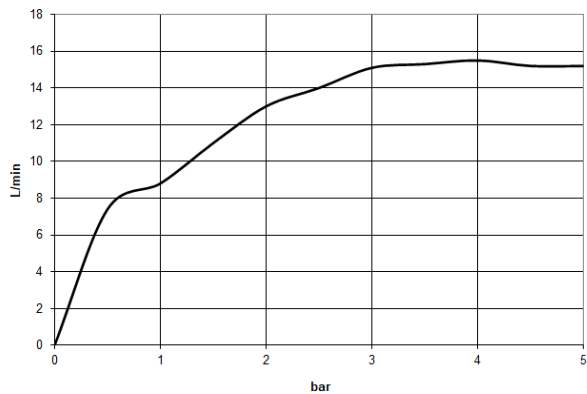

Codes & Standards

DIN 4109

EN 1717

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



## Hand shower set with integrated shower holder - Brushed Dark Platinum

SERIES SPECIFIC


27 803 660 Product version from 8/1/2018 to 6/3/2020

### Certificates and sustainability

LGA\_29

Belgaqua\_24-007-2 LGA\_29

WRAS\_250402

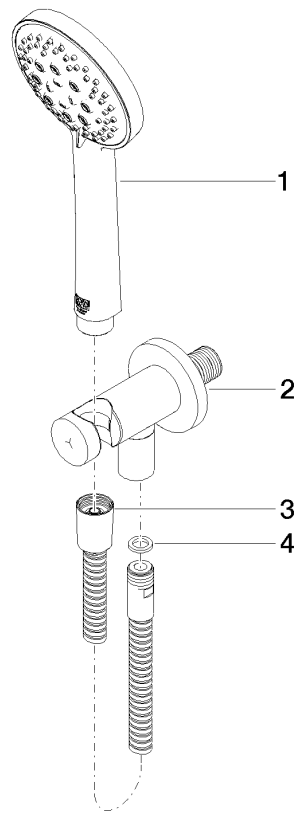

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
2	28 490 660-99	Wall elbow with integrated shower holder - Brushed Dark Platinum	1.00	40
1	28 014 979-99	Hand shower 7.6 l/min - Brushed Dark Platinum	1.00	-
Spare part can no longer be ordered, please order the replacement item				
	28018979-99	Hand shower 100 mm - Brushed Dark Platinum		
4	90 14 20 026 00 90	Washer 14 x 8 x 2 mm Centellen WS 3820 -	1.00	14
3	90 30 02 072 00-99	Metal shower hose 1/2" x 3/8" x 1250 mm - Brushed Dark Platinum	1.00	40