


## Syl-Lab IP65 600x600 (Surface Mounted) SYL-LAB LED IP65 SURFACE 36W 4K OPAL 600 EB 0055376



### Product features

- IP65 Panel, dual IP65 (above and below), surface mounted, CRI80, tamper proof, steel construction, opal plexiglass diffuser, Tp(b) rated, 36W, 3950lm, 110lm/W, IK08, 4000K, 3 Step MacAdam Ellipse, driver current 800mA, Class 1, UGR<21, 220-240V, Average lifespan 90.000Hrs, HxWxD 656x656x90mm.




### PRODUCT OVERVIEW

Product name	SYL-LAB LED IP65 SURFACE 36W 4K OPAL 600 EB
Technology	LED
Housing	Steel
Mount	Ceiling surface mounting
General application	Logistics & Industry, Office
ETIM Class	EC002892
Warranty	5 years
Useful luminous flux (Fuse)	3750
Fixture luminous flux (lm)	3750
Luminous flux (lm)	3750
Luminaire efficacy (lm/W)	104
LOR (%)	100
Correlated colour temperature (k)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 21
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP65
IK rating	IK08
Product EAN number	5410288553764

### PHOTOMETRY

## Syl-Lab IP65 600x600 (Surface Mounted) SYL-LAB LED IP65 SURFACE 36W 4K OPAL 600 EB 0055376

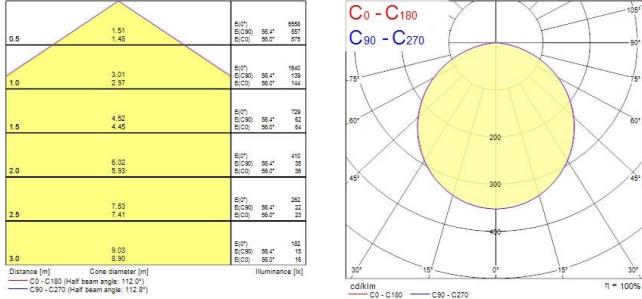

### TECHNICAL DRAWINGS

