

### Features

- IP65 Panel, dual IP65 (above and below), surface mounted, CRI80, tamper proof, steel construction, opal plexiglass diffuser, Tp(b) rated, 36W, 3950lm, 110lm/W, IK08, 4000K, 3 Step MacAdam Ellipse, driver current 800mA, Class 1, UGR<21, 220-240V, Average lifespan 90.000Hrs, HxWxD 656x656x90mm.


### Product Overview

<b>Product name</b>	SYL-LAB LED IP65 SURFACE 36W 4K OPAL 600 EB
<b>Technology</b>	LED
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling surface mounting
<b>General application</b>	Logistics & Industry, Office
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	3750
<b>Luminous flux (lm)</b>	3750
<b>Luminaire efficacy (lm/W)</b>	104
<b>LOR (%)</b>	100
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Beam Angle (°)</b>	120
<b>Glare control</b>	< 21
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	36
<b>Electrical protection</b>	Class I
<b>LED Flickering Rate</b>	Ultra low (5% or less)
<b>Housing colour</b>	White
<b>IP rating</b>	IP65
<b>IK rating</b>	IK08
<b>Product EAN number</b>	5410288553764

## SYL-LAB LED IP65 SURFACE 36W 4K OPAL 600 EB 0055376

Warranty	5 years
Dimming method	N/A
Colour Code	840
Useful luminous flux (#use)	3750

### Photometry

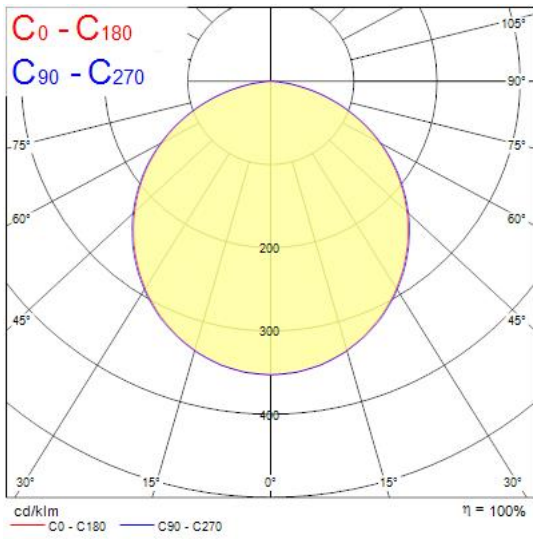

### Technical drawings

